

Division 10 Catalog

Washroom Accessories from Bradley One source to perfectly accessorize every application




JXT Company Working Together to Get the Job Done!

JXT Company | 828-735-1978 | 828-538-4311 | sales@jxtcompany.com

BRADLEY WASHROOM ACCESSORIES WARRANTY

Product warranties may be found on **bradleycorp.com**

ACCESSIBILITY GUIDELINES

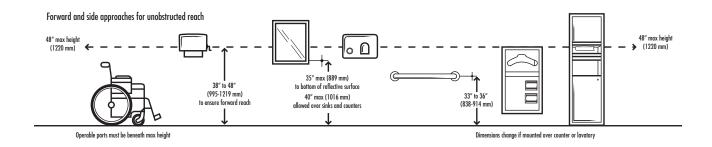

Note: Information from the ADA-ABA Accessibility Guidelines for Buildings and Facilities found on The United States Access Board website: http://www.access-board.gov/

BradEX[®] SHIPPING PROGRAM

icon next to a model number indicates a BradEX® item.

All products designated as BradEX[®] products will ship three business days after the date the order has been entered and acknowledged by the Bradley Corporation. Standard shipping terms apply.

Please note: The entire order must consist of BradEX products to qualify for three business day shipping.

Need it faster? One day shipping is available with the Rush Express (BX-RX) shipment option. Maximum quantities apply, please contact your local Bradley representative for further information.

CONTENTS

COMMERCIAL RESTROOM

3 Aerix[®] Hand Dryers

4 Grab Bars

- 5 Grab Bars
- 6 Grab Bar Configurations
- 11 Grab Bars: Swing

12 Aerix Hand Dryers

14 Towels & Waste

- 14 Multi-Purpose
- 16 Waste Receptacles
- 21 Towel Dispensers
- 27 Combination Units

34 Soap Dispensers

- 34 Wall-Mounted
- 38 Deck-Mounted

40 Mirrors & Shelves

- 40 Mirrors
- 43 Shelves

44 Toilet Tissue Dispensers

- 44 Controlled Delivery
- 45 Non-controlled Delivery
- 48 Jumbo Roll
- 51 Combination Units

54 Seat Cover Dispensers

55 Napkin Disposals & Vendors

- 55 Napkin Disposals
- 57 Vendors

58 Baby Changing Stations

SPECIALTY APPLICATIONS

59 Shower Products

- 59 Shower Seats
- 63 Shower Curtains
- 63 Shower Hooks
- 64 Shower Rods

66 Security

- 66 Hooks
- 67 Grab Bars
- 68 Shelves
- 69 Mirrors
- 70 Soap Dishes
- 70 Toilet Tissue Holders
- 71 Toothbrush Holders

72 Hospitality

- 72 Toothbrush Holders
- 72 Towel Bars & Shelves
- 75 Soap Dishes
- 77 Facial Tissue Dispensers
- 78 Hooks
- 81 Towel Rings
- 81 Miscellaneous
- 82 Custodial
- 84 Health Care
- 85 Medicine Cabinets
- 86 Mills[®] Partition87 Partition Styles
- 88 Lenox[®] Lockers
- 89 Maintenance Instructions
- 90 Index





Standard Series

The standard look: framed, rectangular, stainless steel accessories

Contemporary Series

A cleaner stainless steel front, no visible frame, attractive curved openings

Diplomat[™] Series

Elevate your room's look with the unique dual-curve geometry of Diplomat[™] Series Accessories





Bradley's complete line of Aerix[®] hand dryers cover any application or budget. These dryers reduce paper towel and energy costs, protect the environment, keep noise levels down and are easy to use and maintain. **NEW Aerix+** dryers incorporate the latest technology for the fastest drying times available. And the vertical, dual-sided dryer has an easy-to-empty water collection tray to keep floors and walls clean.

F

Acrix⁺ New!

The latest dryer technology for ultra fast dry times. Extremely powerful, yet highly efficient.

2921 SERIES

Vertical, dual-sided dryer with 25% more hand drying space and easy-to-empty water collection resevoir to keep floors and walls spotless. Plus, the intelligent LED display indicates when to empty the water tray and change the HEPA filter.

- 10-12 second dry time
- Adjustable speed

Intelligent LED display for easy maintenance High impact cover with antimicrobial technology HEPA filter with odor neutralizing technology Quieter operation than popular models Durable and vandal resistant





2922 SERIES

These highly efficient, ultra high speed hand dryers use 40% less energy and offers the longest service life of any high speed hand dryer. Plus, flexible controls let you customize air flow, sound quality and heating options to fit any application.

10-12 second dry time

Adjustable speed

Longest service life of any high speed dryer

Energy efficient

Customize to fit any application

Cover and internal airflow path with antimicrobial technology

Durable and vandal resistant



2922-2873




2922-2874

All Bradley Grab Bars are designed for safety and security of the physically disabled, and feature the 1.5" (38 mm) safety clearance recommended by Barrier-Free design experts and required under most codes.

See technical data for BradEX sizes.

Anchoring Devices

Building construction will govern the type of anchorage required.



Standard Safety Clearance

meets ADA requirements.

Note: All mounting kits must be specified as optional extras. Order one kit for each flange.

See technical data for details.

Bradley will design and manufacture modified bars to satisfy unique installation applications. Contact your local Bradley representative for information.

How to Specify Grab Bars

1. Select Series Number (812, 817, 832, etc.)

Heavy-Duty Series 1.5" (38 mm) 1.25" (32 mm) 1" (25 mm) Mounting diameter diameter diameter 832 Concealed 812 852 817 837 857 Exposed

2. Select Finish Option (standard, safety grip, etc.)


Feature	Add Suffix
Standard	0
Safety Grip Finish	2
Bright Polished Finish	4
Bright Polished Finish with Safety Grip	7

3. Select Grab Bar Configuration (001, 002, 005, etc.)



4. Select Dimensions Required

If no modifications are required to the dimensions, an example of the Part No. is:



Always list dimensions in alphabetical order (i.e., 36" x 20" (914 mm x 508 mm))


Note: If modifications are required to the dimensions other than A, B, or C, or if fractions are needed, contact Bradley for a submittal and special number. Unless otherwise stated, stand-off will be on long section of bar. All dimensions shown in diagrams are from wall to centerline of mounting flange or centerline of grab bar. Standard clearance is 1.5" (38 mm).


Features

- Heavy-duty, 18-gauge stainless steel tubing
- Meets or exceeds requirements of ANSI Standard A117.1, ADA and ABA Accessibility Guidelines for Buildings and Facilities (ADAAG) and Uniform Federal Accessibility Standard (UFAS)
- Select configurations of the 812 and 817 series meet bariatric load requirements of the American Society of Healthcare Engineers (ASHE) 2010 guidelines for design and construction of healthcare facilities
- · Attractive satin finish, safety grip finish or polished safety grip finish
- Easy to install with optional anchoring devices

How to Measure Grab Bars

All Grab Bar Configurations are specified using centerline to centerline dimensions.





- Obtain length of side bars: Side wall dimension - (Safety clearance 1.5" (38 mm) + 1/2 Diameter of Grab Bar + 2" (51 mm))
- 2. Obtain back bar dimension:

Back wall dimension - (Safety clearance 1.5" (38 mm) + 1/2 Diameter of Grab Bar x 2" (51 mm))


Example: 812 Series Grab Bar:


If wall dimensions are 30" (762 mm) side x 58" (1473 mm) back x 30" (762 mm) side, then:


Sides: 30" - (1.5" + .75" + 2") = 25.75" (762 mm - (38 mm + 19 mm + 51 mm) = 654 mm)


Back: 58" - (1.5" + .75" x 2") = 53.5" (1473 mm - (38 mm + 19 mm + 51 mm) = 1359 mm)

Grab Bar dimensions would be 25.75" x 53.5" x 25.75" (654 mm x 1359 mm x 654 mm)




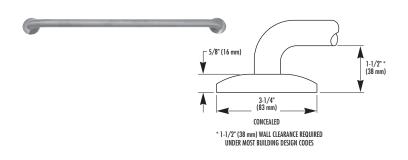


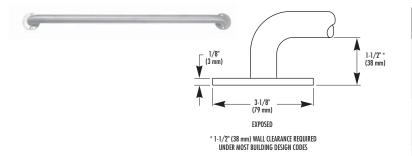

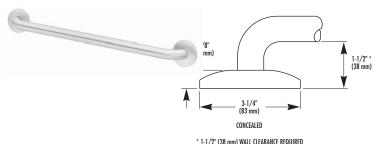

UNDER MOST BUILDING DESIGN CODES



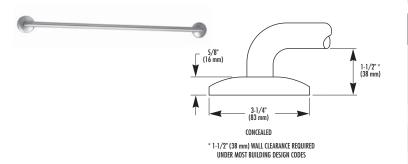

812 SERIES

Grab bar of 1.5" (38 mm) O.D., 18-gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish. Mounting flanges concealed by snap-on escutcheons. Antimicrobial option is available for select sizes.

- -2 Safety-Grip Finish
- -4 High-Polish Finish
- -7 Safety Grip with Polished Finish on Ends

See technical data for BradEX sizes

BX

3

3

3

817 SERIES

Grab bar of 1.5" O.D. (38 mm), 18-gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish. Exposed mounting flanges.

- -2 Safety-Grip Finish
- -4 High-Polish Finish
- -7 Safety Grip with Polished Finish on Ends

832 SERIES

Grab bar of 1.25" O.D. (32 mm), 18-gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish. Mounting flanges concealed by snap-on escutcheons.

- -2 Safety-Grip Finish
- -4 High-Polish Finish
- -7 Safety Grip with Polished Finish on Ends

See technical data for BradEX sizes

BX

3

BX

837 SERIES

Grab bar of 1.25" O.D. (32 mm), 18-gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish. Exposed mounting flanges.

- -2 Safety-Grip Finish
- -4 High-Polish Finish
- -7 Safety Grip with Polished Finish on Ends

See technical data for BradEX sizes


852 SERIES

Grab bar of 1" O.D. (25 mm), 18-gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish. Concealed mounting flanges.


- -2 Safety-Grip Finish
- -4 High-Polish Finish
- -7 Safety Grip with Polished Finish on Ends

6


Typical Water Closet Applications

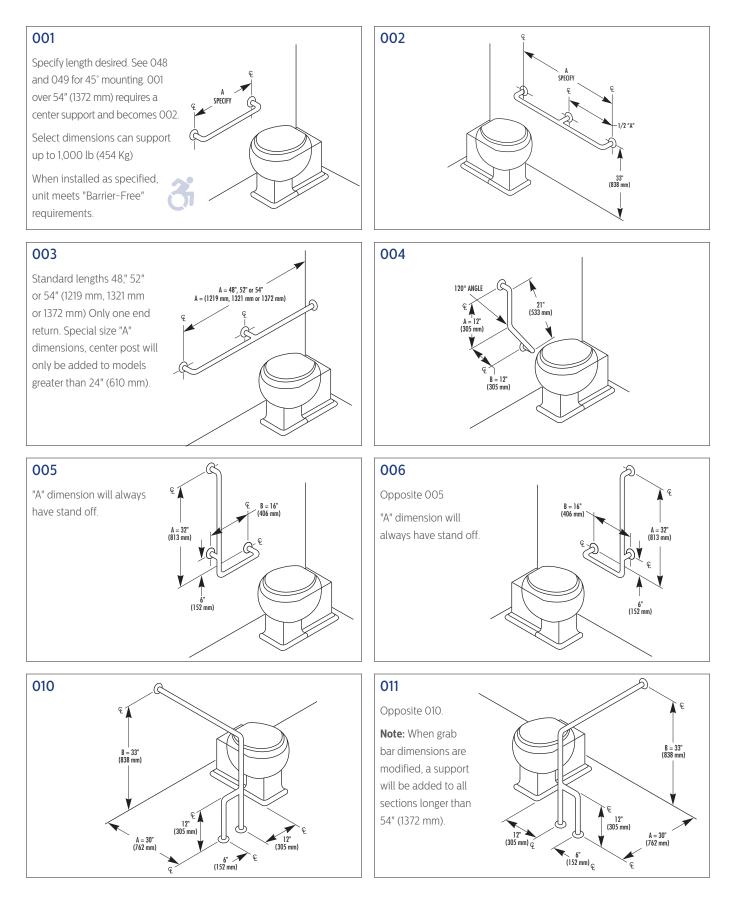



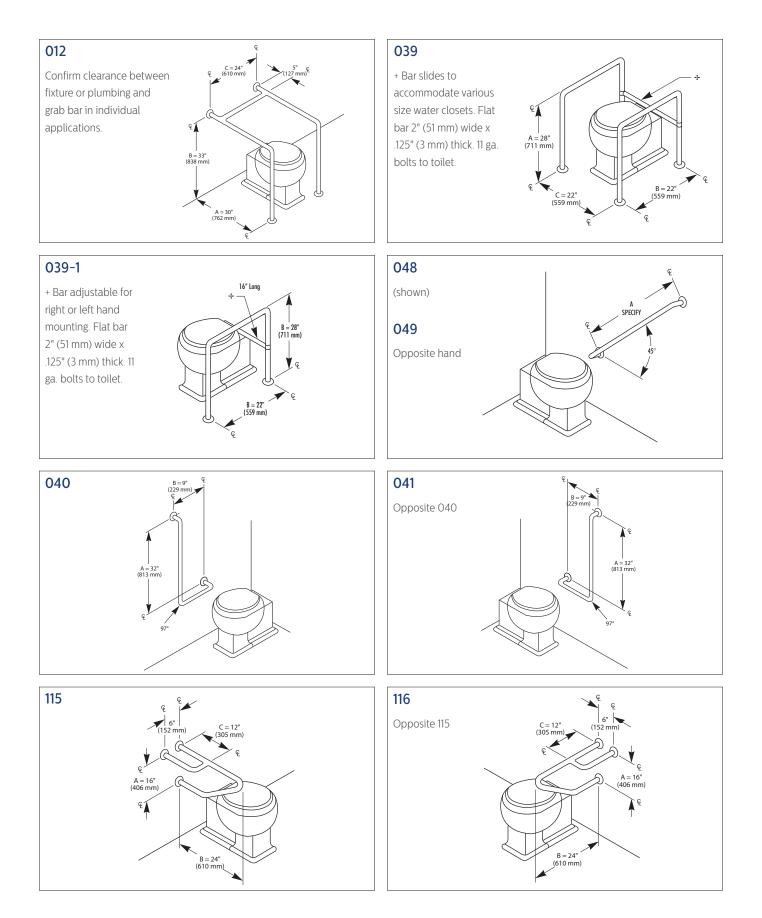


Typical Water Closet Applications

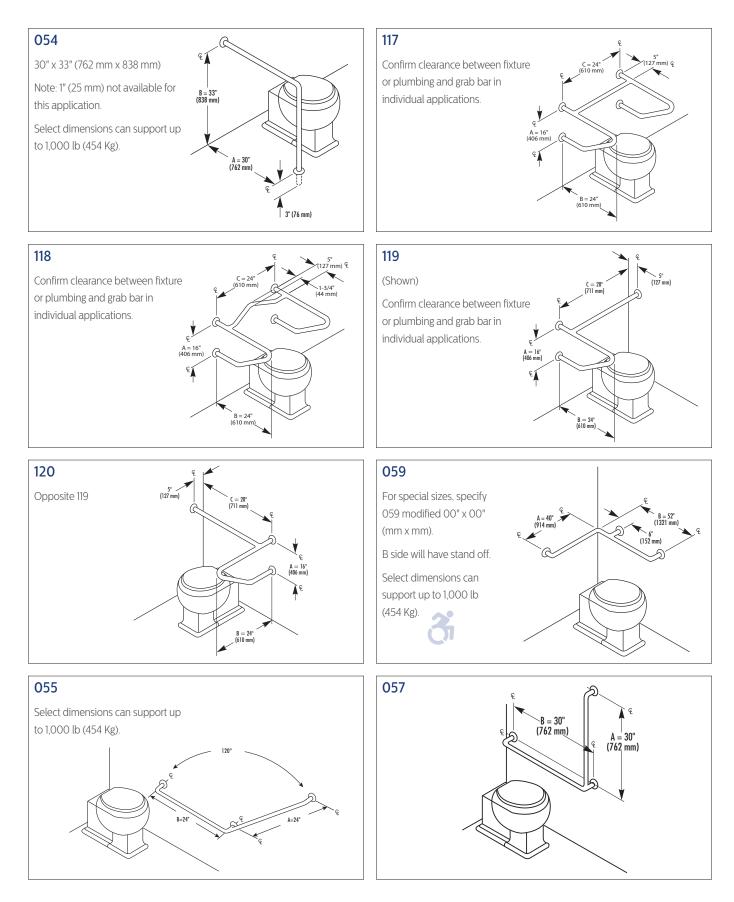


8




Typical Shower Applications

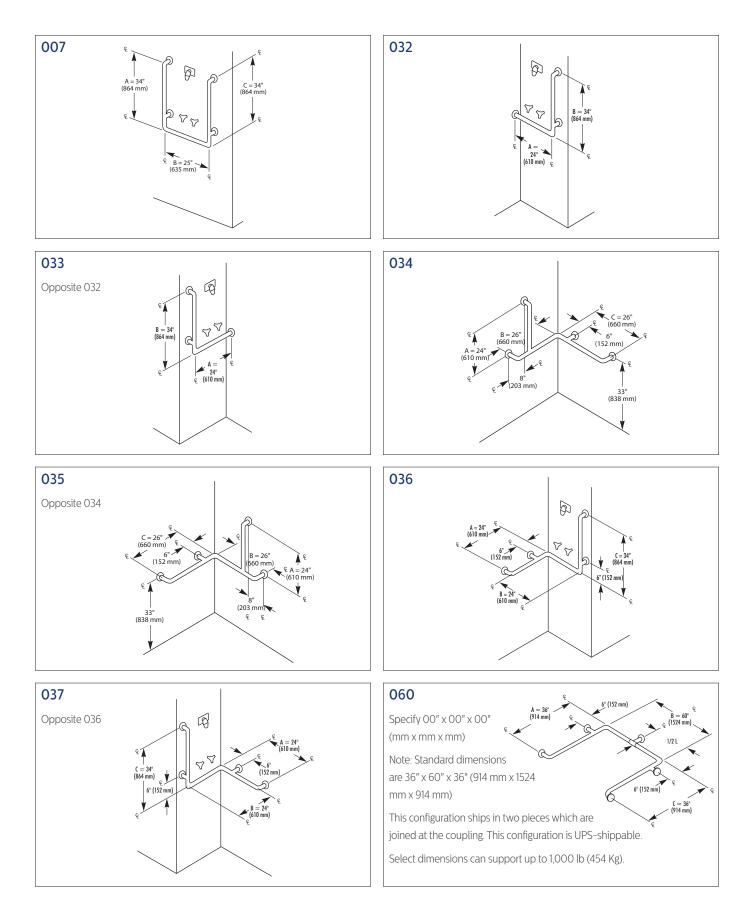

Typical Tub Applications

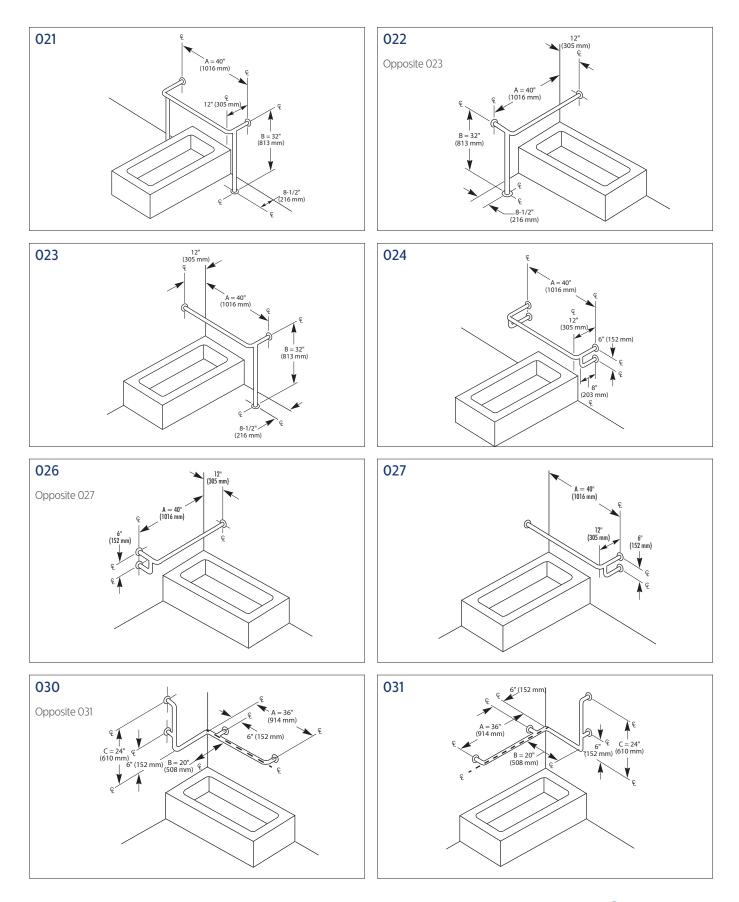



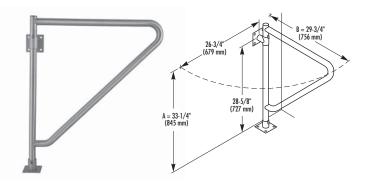

MODEL 8170-158


Swing-away grab bar can be rotated to a support or departure position. Locks into support position.

1.5" O.D. (38 mm), 18-gauge stainless steel with exposed surfaces in architectural satin finish. Wall and floor flanges of 0.1875" (5 mm) thick stainless steel plate.

-2 Safety-Grip Finish

MODEL 8170-1581

With Integral Tissue Dispenser

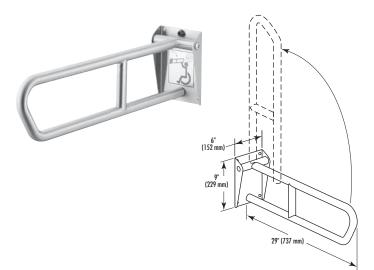

MODEL 8370-101

3 BX

Swing-up grab bar swings up when not in use. Designed to prevent it from accidentally falling into position. Operates with less than 5 lb (2.3 Kg) of force.

1.25" O.D. (32 mm), 18-gauge stainless steel with exposed surfaces in architectural satin finish. Bar projects 29" (737 mm) from wall when in horizontal position.

-2 Safety-Grip Finish

MODEL 8370-102



Bar projects 34" (864 mm) from wall in horizontal position.


MODEL 8370-103



Swing-up grab bar with integral tissue dispenser. Swings up when not in use. Operates with less than 5 lb (2.3 Kg) of force.


1.25" O.D. (32 mm), 18-gauge stainless steel with exposed surfaces in architectural satin finish. Tissue dispenser spindle of ABS plastic with concealed spring. Bar projects 29" (737mm) from wall in horizontal position.

-2 Safety-Grip Finish

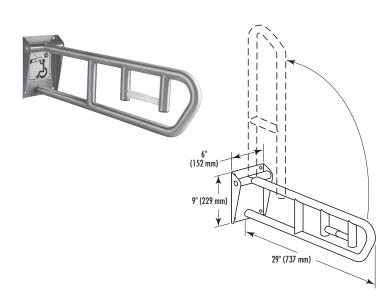

Bradley's Aerix[®] hand dryers save time, money and headaches. NEW Aerix+ models offer the ultimate in highspeed, high efficiency hand drying. There is an Aerix model to suit every application!





NEW MODEL 2921-S000



BX

BX

Aerix+ high speed, vertical dual-sided dryer. Surfacemounted. Adjustable speed. High impact ABS cover in silver.

10-12 second dry time

25% greater hand drying opening for more space and comfort

Easy-to-empty water collection reservoir for clean floors and walls

Replaceable HEPA filter


Overall dimensions 13" W x 26.25" H x 9.25" D

(330 x 667 x 235 mm)

NEW MODEL 2921-W000 (3) BX

Surface-mounted. High impact ABS cover in white





NEW MODEL 2922-2873

Aerix+ high speed, vertical dual-sided dryer. Surfacemounted. Adjustable speed. White cast aluminum cover with epoxy paint.

10-12 second dry time

The longest service life of any high speed hand dryer

Uses 40% less energy than any high speed hand dryer

Overall dimensions 9.3" W x 13" H x 7.6" D (236 x 330 x 193 mm)

NEW MODEL 2922-2874

Surface-mounted. Stainless steel finish cover with satin finish.





NEW MODEL 2901-2873

Surface-mounted. One-piece steel cover with white epoxy finish

12-15 second dry time

Universal voltage

Adjustable speed

Quieter operation than other dryers on the market

Overall dimensions 8.4" W x 13" H x 6.6875" D (213 x 330 x 170 mm)


NEW MODEL 2901-2874

Surface-mounted. Stainless steel finish cover with satin finish



BX







MODEL 2902-280000

Aerix adjustable speed dryer with 0.1875" (5 mm) thick porcelain cast iron cover, white.

Adjustable speed hand dryer

"No-Touch" sensor operation

12-15 second drying time

Universal voltage

Vandal-resistant

Surface-Mounted, Mounting holes match those of most popular models.

Overall dimensions 11.375" W x 10.6" H x 4" D (289 x 269 x 102 mm)

MODEL 2902-287300

BX

BX

BX

(Hind States)


BX


0.0625" (2 mm) thick white enamel coated steel cover

MODEL 2902-287400

0.0625" (2 mm) thick stainless steel cover with satin finish







MODEL 2903-280000

Infrared sensor activation. Cast iron cover, white.

29 second drying time.

Surface-mounted, mounting holes match those of most popular models

Overall dimensions 11.125" W x 10" H x 8.25" D (283 x 254 x 210 mm)

MODEL 2904-280000



Push button activation. Cast iron cover, white.

MODEL 2905-287300




Modern design. "No-Touch" sensor activation. Steel cover.

38 second drying time

Ideal for medium-to-low traffic and medium-to-low vandal applications

Overall dimensions 10.167" W x 11.875" H x 5.5" D (258 x 302 x 140 mm)


Bradity®



Towels & Waste Multi-Purpose

You need options and we have them. Accessories to fit every washroom – and every budget. Contemporary satin finish stainless steel design to match any decor in recessed, semi-recessed and surface-mounted styles. From stylish restaurants and office buildings to schools and recreation centers, Bradley's line of accessories will fit any application.






MODEL 1471

Recessed unit dispenses 250 multi-fold or 150 C-fold towels. Swing out soap dispenser for filling with capacity for 40 oz (1.2 L) of liquid soap. Sight gauge indicates refill time.

Rough wall opening 15.5" W x 11.25" H x 4" D (394 x 286 x 102 mm)

-11 Surface-Mounted projects 4" (102 mm) from wall.





MODEL 155


Mirrored door 15" W x 18" H (381 mm x 457 mm). 800 multifold or 600 C-fold towel capacity.

Rough wall opening 15.625" W x 29.125" H x 4" D (397 x 740 x 102 mm)

-10 Semi-Recessed projects 2" (51 mm) from wall

-11 Surface-Mounted projects 4" (102 mm) from wall





MODEL 198

ð

ð

3


For use behind continuous mirror or finished wall. 800 multifold or 600 C-fold towel capacity. Lock secured.

Rough wall opening 15.625" W x 30.25" H x 4" D (397 x 768 x 102 mm)

Use with 0.5" (13 mm) thick drywall installations.








In-wall mounted towel dispenser for use behind mirror. Dispenses 800 multi-fold or 600 C-fold towels. Lock secures behind hinged dispenser lip which opens for bottom refilling.

3

3

Rough wall opening 12.5" W x 18.5" H x 4" D (318 x 470 x 102 mm)





MODEL 1985

For use behind continuous mirror or finished wall. 800 multifold or 600 C-fold towel capacity. Lock secures hinged towel dispenser lip which opens for refilling from bottom.


Rough wall opening 15.625" W x 30.25" H x 4" D (397 x 768 x 102 mm)

Use with 0.625" (16 mm) thick drywall installations.

Towels & Waste Receptacles

Bradley Waste Receptacles provide convenience and durability. Units are fabricated of stainless steel with exposed surfaces in architectural satin finish. Recessed units feature one-piece, stainless steel flanges of welded construction with seamless corners, burr-free edges and 0.25" 6 mm) return to conceal wall irregularities.





MODEL 3A05

Diplomat Series

Designed with unique dual-curve geometry. Constructed of architectural satin finish stainless steel. 12 gal (45.4 L), removable, stainless steel waste receptacle. Secured to cabinet with tumbler lock. Recess-mounted.

BX (J

3 BX


đ

A

Rough wall opening 15.75" W x 29.1875" H x 4" D (400 x 741 x 102 mm)

- -10 Semi-Recessed 2" (51 mm) in wall, projects 6.6875" (170 mm) from wall
- -11 Surface-Mounted projects 8.6875" (221 mm) from wall.





@

12" (305 mm)

(229 mm) Ì

MODEL 3A15-11

Diplomat Series

Designed with unique dual-curve geometry. Constructed of architectural satin finish stainless steel. 16.5 gal (62.5 L), stainless steel waste receptacle. Unit measures 16.6875" W x 23.375" H x 11.6875" D (424 x 594 x 297 mm)

MODEL 3157


Contemporary Series

Recessed unit with push-flap door and 9.2 gal (34.8 L), removable, leakproof, molded-plastic insert.

Rough wall opening 12.5" W x 47.5" H x 6.5" D (318 x 1206 x 165 mm)

- -10 Semi-Recessed 3" (76 mm) in wall, projects 3.75" (95 mm) from wall
- -11 Surface-Mounted projects 6.75" (171 mm) from wall.


MODEL 3251



Rough wall opening 12.5" W x 26.5" H x 4" D (318 x 673 x 102 mm)

- -10 Semi-Recessed 2" (51 mm) in wall, projects 2" (51 mm) from wall
- -11 Surface-Mounted projects 4" (102 mm) from wall



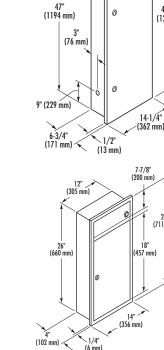






28" (711 mm)

49-1/4" (1251 mm)







12" (305 mm)

47" (1194 mm)

7-1/2" (191 mm) 6-7/8" (175 mm)

39" (991 mm) 49" (1245 mm)

MODEL 3257

Contemporary Series

Recessed unit with push-flap door and 2.8 gal (10.6 L), removable, leak-proof, molded-plastic insert.

Rough wall opening 12.625" W x 26.625" H x 4" D (321 x 676 x 102 mm)

-10 Semi-Recessed 2" (51 mm) in wall, projects 2" (51 mm) from wall.

-11 Surface-Mounted projects 4" (102 mm) from wall.

MODEL 315-35

and tumbler lock keyed alike

Recessed unit with full-length piano hinge and tumbler lock keyed alike to companion Bradley units. 9.2 gal (34.8 L), removable, leak-proof, molded-plastic insert. Push-flap door with full-length piano hinge covers receptacle opening.

Rough wall opening 12.5" W x 47.5" H x 7.5" D (318 x 1207 x 191 mm)

- -10 Semi-Recessed 3.5" (89 mm) in wall, projects 4" (102 mm) from wall.
- -11 Surface-Mounted projects 7.5" (191 mm) from wall.

MODEL 334

BX


F

Recessed waste receptacle shall be fabricated of heavy gauge stainless steel with seamless exposed surfaces in satin finish. Removable 18 gal (68.1 L) stainless steel waste receptacle. Heavy-duty vinyl liner is optional. Receptacle secured to cabinet with tumbler lock.

Overall dimensions: 17.125" W x 30.625" H x 12.75" D (435 x 778 x 324 mm)








14" (356 mm)





Recessed, 12-gallon, removable, stainless steel waste receptacle. Secured to cabinet with tumbler lock. Heavy-duty, reusable, 12 gal (45.4 L) liner available as an accessory. Order separately using part number P11-004.

Rough wall opening 15.625" W x 29.125" H x 4" D (397 x 740 x 102 mm)

Receptacle projects 4.75" (121 mm)


- BX -10 Semi-Recessed 2" (51 mm) in wall, projects 6.75" (171 mm) from wall
- -11 Surface-Mounted projects 8.6875" (221 mm) from wall

MODEL 344-35

Hinged Cover Unit

MODEL 344-65

Push-Flap Door Unit




MODEL 346

Recessed waste receptacle made of heavy gauge stainless steel with seamless exposed surfaces and tumbler lock. in satin finish. Removable 12 gal (45.4 L) stainless steel waste receptacle. Heavy-duty vinyl liner is optional. tumbler lock.

Rough wall opening 15.625"W x 29.125" H x 6" D (397 x 740 x 102 mm)

-10 Semi-Recessed 4" (102 mm) in wall, projects 4.75" (121 mm) from wall

-11 Surface-Mounted projects projects 8" (222 mm) from wall.



MODEL 355



H

F

BX

đ

3


Å

Surface mounted, 20.6 gal (78 L), stainless steel waste receptacle. Heavyduty, reusable, 20.6 gal (78 L) liner available as an accessory. Order separately using part number P11-005.


Unit measures 18" W x 23" H x 11.5" D (457 x 584 x 292 mm)

MODEL 355-35

Hinged Cover Unit







16.5 gal (62.5L), stainless steel waste receptacle. Heavy-duty, reusable, 16.5 gal (62.5L) liner available as an accessory. Order separately using part number P11-006.

Unit measures 18" W x 23" H x 9" D (457 x 584 x 229 mm)

MODEL 356-35



Hinged Cover Unit

MODEL 3565



G BX

ð

12 gal (45.4 L), stainless steel waste receptacle.

MODEL 357




6.5 gal (24.6 L), stainless steel waste receptacle. Heavy-duty, reusable,6.5 gal (24.6 L) liner available as an accessory. Order separately using part number P11-007.

Unit measures 14" W x 18" H x 6" D (356 x 457 x 152 mm)

MODEL 357-35

Hinged Cover Unit





14" (356 mm) 6" (152 mm)

> 18" (457 mm)

MODEL 359




3


1.5 gal (5.8 L), stainless steel waste receptacle. Utilizes disposable, wetstrength paper liner.

Unit measures 10.625" W x 9.125" H x 4.5" D (270 x 232 x 114 mm)


Towels & Waste Receptacles

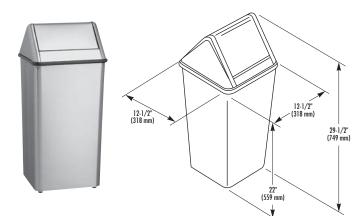














MODEL 377

Freestanding, 13 gal (49.2 L), stainless steel waste receptacle

BX

ð

Removable swing top

Unit measures 29.5" H x 12.5" SQ (749 x 318 mm)

MODEL 377-37

Less Swing Top

MODEL P15-025

Cover Only



MODEL P15-098

Cover Only



MODEL P15-195

Cover Only

MODEL P10-696 BX

Unit fabricated of stainless steel of drawn seamless construction and bright polished finish

Countertop rough-in 6" (152 mm) diameter hole

Overall dimensions 6.75" (171 mm) diameter x 3.5" (89 mm) D




3

F


H

3









MODEL 2A00

Diplomat Series

Designed with unique dual-curve geometry. Constructed of architectural satin finish stainless steel. Dispenses 800 multi-fold or 600 C-fold towels.

Rough wall opening 15.5" W x 29.125" H x 4" D (394 x 740 x 102 mm)

-10 Semi-Recessed 2" (51 mm) in wall, projects 4.5625" (116 mm) from wall.

MODEL 2A01

Diplomat Series

Lever operated towel dispenser delivers preset length of towel (5.5" (140 mm) per stroke). Towel dispenser capacity is one standard core 8" (203 mm) W x 8" (203 mm) diameter standard roll paper towels.

Rough wall opening 15.5" W x 29.125" H x 9.75" D (394 x 740 x 248 mm)

-10 Semi-Recessed 4" (102 mm) in wall, projects 8.5" (216 mm) from wall.

-11 Surface-Mounted projects 12.5" (318 mm) from wall.

MODEL 2A02

Diplomat Series

Sensor-activated roll paper towel dispenser delivers 10" (254 mm) per operation. Towel dispenser capacity is one standard core 8" (203 mm) W x 8" (203 mm) diameter standard roll paper towels.

Rough wall opening 15.5" W x 29.125" H x 9.75" D (394 x 740 x 248 mm)

- -10 Semi-Recessed 4" (102 mm) in wall, projects 8.5" (216 mm) from wall.
- -11 Surface-Mounted projects 13.25" (337 mm) from wall.

MODEL 2A09

Diplomat Series

Designed with unique dual-curve geometry. Constructed of architectural satin finish stainless steel. Designed for field installation of customer-provided towel dispenser. Suggested use with 2496 and 2497.

Rough wall opening 15.5" W x 29.125" H x 9.75" D (394 x 740 x 248 mm)

-10 Semi-Recessed 4" (102 mm) in wall, projects 8.5" (216 mm) from wall.

-11 Surface-Mounted projects 13.25" (337 mm) from wall.

MODEL 2A10-11

Diplomat Series

Designed with unique dual-curve geometry. Constructed of architectural satin finish stainless steel. Surface-mounted, paper towel dispenser. Dispenses 800 multi-fold or 600 C-fold towels.

Unit measures 11" W x 14.375" H x 5.25" D (279 x 365 x 133 mm)










Si BX





10-7/8" (276 mm)

15-3/16" (386 mm)

4" (102 mm)

10" (254 mm)

17-1/8" (435 mm)

MODEL 244

Constructed of architectural satin finish stainless steel. Dispenses 800 multi-fold or 600 C-fold towels.

Rough wall opening 12.5" W x 26.625" H x 4" D (318 x 676 x 102 mm)

- -10 Semi-Recessed 2" (51 mm) in wall, projects 2" (51 mm) from wall
- -11 Surface-Mounted projects 4" (102 mm) from wall

MODEL 2441



3


3

(ði

Constructed of architectural satin finish stainless steel. Dispenses 475 multi-fold or 350 C-fold towels.

- Rough wall opening 11.375" W x 15.6875" H x 4" D (289 x 398 x 102 mm)
- -10 Semi-Recessed 2"(51 mm) in wall, projects 2" (51 mm) from wall
- -11 Surface-Mounted projects 4" (102 mm) from wall





12-3/4" /(324 mm)

MODEL 2442


Contemporary Series

Constructed of architectural satin finish stainless steel. Dispenses 400 multi-fold or 300 C-fold towels.

Rough wall opening 11.40625" W x 15.75" H x 4" D (290 x 400 x 102 mm)

- -10 Semi-Recessed 2.125" (54 mm) in wall, projects 2" (51 mm) from wall
- -11 Surface-Mounted projects 4.125" (105 mm) from wall





MODEL 2447

Contemporary Series

Constructed of architectural satin finish stainless steel. Dispenses 800 multi-fold or 500 C-fold towels.

Rough wall opening 12.6875" W x 26.625" H x 4" D (322 x 676 x 103 mm)


- -10 Semi-Recessed 1.625" (41 mm) in wall, projects 2.5" (64 mm) from wall
- -11 Surface-Mounted projects 4.125" (105 mm) from wall
















Constructed of architectural satin finish stainless steel. Dispenses singlefold, 800 multi-fold or 500 C-fold towels.

Rough wall opening 12.5" W x 26.625" H x 7.5" D (318 x 676 x 191 mm)


- -10 Semi-Recessed 3.5" (89 mm) in wall, projects 4" (102 mm) from wall.
- -11 Surface-Mounted projects 7.5" (191 mm) from wall.

MODEL 2479

Constructed of architectural satin finish stainless steel. Dispenses one standard core center pull towel roll up to 9" x 9" (229 mm x 229 mm) diameter.

Rough wall opening 15.1875" W x 28.75" H x 11.125" D (386 x 730 x 283 mm)

-10 Semi-Recessed 3.5" (89 mm) in wall, projects 8" (203 mm) from wall.



MODEL 2482-11




3

Constructed of architectural satin finish stainless steel. Surface-mounted, roll paper towel dispenser. Push-bar operated. Baked-enamel towel dispenser mechanism. Unit dispenses non-perforated roll towels up to 8" (203 mm) in diameter and 8" (203 mm) wide with core sizes from 1.5" (38 mm) to 2" (51 mm).

Unit measures 11" W x 17" H x 10.5" D (279 x 432 x 267 mm)






MODEL 2483

Constructed of architectural satin finish stainless steel. Surface-mounted, roll paper towel dispenser. Lever operated. Dispenses one standard core 8" (203 mm) or 9" (229 mm) wide x 800' (243.9 M) long paper towel roll.

Unit measures 12.25" W x 15" H x 10.375" D (311 x 381 x 264 mm)





Recessed or semi-recessed towel dispenser constructed of stainless steel with exposed surfaces in satin finish. Cabinet door secured with full length piano hinge and tumbler lock. Towel dispenser operated with less than 5 lb (2.3 Kg) of force. Dispenses one standard core 8" (203 mm) or 9" (229 mm) wide x 800' (243.9 M) long paper towel roll.

Unit measures 17.125" W x 17.125" H x 10.5" D (435 x 435 x 267 mm)

MODEL 2494


Constructed of high impact material. Door is translucent, and fabricated from durable high-impact plastic. Dispenses nonperforated roll towels up to 8" (203 mm) in diameter and 8" (203 mm) wide with core sizes from 1.5" (38 mm) to 2" (51 mm). Dispenser also allows for 3" (76 mm) diameter stub roll. Operates with 4 "D" size alkaline batteries. Batteries are not included. Automatic transfer system will integrate stub roll when the primary is nearly depleted. Low battery indicator. Sheet is fully protected until dispensed. The transfer system, roll holders and door are field replaceable. Complies with FCC regulation on EMC.

Unit measures 12.4375" W x 15.75" H x 9.5" D (316 x 400 x 241 mm)









MODEL 2495


Constructed of high-impact plastic. Black translucent cover with speckled gray base. Black plastic handle is treated with Bio-Pruf® to inhibit bacteria growth. Dispenses one 8" (203 mm) wide paper towel roll and one 4" (102 mm) partial (stub) roll. 1.5" (38 mm) core diameter. Lever-operated dispensing mechanism will provide an adjustable means to dispense a nominal 5" (127 mm), 4" (102 mm) or 2.5" (64 mm) of toweling per lever stroke. Toweling will only be dispensed with the downward stroke of the lever.

Unit measures 12.9375" W x 16.5" H x 9.25" D (329 x 419 x 235 mm)



BX






Constructed of high impact material. Door is translucent, and fabricated from durable high-impact plastic. Dispenses nonperforated roll towels up to 8.5" (216 mm) in diameter and 8" (203 mm) wide with core sizes from 1.5" (38 mm) to 2" (51 mm). Dispenser also allows for 4" (102 mm) diameter stub roll. A 10" (254 mm) towel will be dispensed every time the sensor is activated. Operates with 4 "D" size alkaline batteries (not included). Automatic transfer system will integrate stub roll when the primary is nearly depleted. A flashing red indicator light indicates that batteries need to be replaced.

Unit measures 11.75" W x 16.5" H x 9.25" D (298 x 419 x 235 mm)





MODEL 2497

Constructed of high-impact plastic. Fiberglass-reinforced ABS plastic push lever. Dispenses non-perforated paper towels from 8" (203 mm) wide roll with core sizes from 1.5" (38 mm) to 2" (51 mm) diameter. Dispenser also allows for 4" (102 mm) diameter stub roll. The push lever dispensing mechanism delivers 5.5" (140 mm) of toweling with each stroke.

Unit measures 10.5625" W x 15.6875" H x 8.625" D (268 x 398 x 219 mm)

MODEL 250-15

Constructed of architectural satin finish stainless steel. Surfacemounted, paper towel dispenser. Dispenses 525 multi-fold or 400 C-fold towels. Tumbler lock and bottom hinged. Refill indicator on cabinet face.

Unit measures 11" W x 15.3125" H x 4" D (279 x 389 x 102 mm)

-33 White Enamel Finish

- -1578 Bright Polish Finish
- -250W-15 Frequency Towel Dispenser


MODEL 251-15

Constructed of architectural satin finish stainless steel. Surfacemounted, paper towel dispenser. Dispenses 400 single-fold towels. Tumbler lock and bottom hinged. Refill indicator on cabinet face.


Unit measures 11" W x 8.125" H x 6.0625" D (279 x 206 x 154 mm)

-33 White Enamel Finish










BX

BX

BX

BX








Constructed of architectural satin finish stainless steel. Surfacemounted, paper towel dispenser. Dispenses 350 multi-fold or 200 C-fold towels. Cabinet secured with tumbler lock and hinges at bottom. Refill indicator on cabinet face.

Unit measures 11" W x 8" H x 4" D (279 x 203 x 102 mm)

-78 Bright Polish Finish



MODEL 259





Surface-mounted, roll paper towel dispenser. Constructed of die-cast aluminum. Controlled delivery mechanism. Spring allows spindle to be released for filling. Holds one standard core roll paper towels to 6" (152 mm) diameter x 11" (279 mm) wide.


Unit measures 13" W x 1.75" H x 4" D (330 x 44 x 102 mm)
















MODEL 2A05



3

F

3

Diplomat Series

Designed with unique dual-curve geometry. Constructed of architectural satin finish stainless steel. Dispenses 800 multifold and 600 C-fold paper towels. 12 gal (45.4 L), stainless steel waste receptacle.

- Rough wall opening 15.75" W x 54.5" H x 4" D (400 x 1384 x 102 mm)
- -10 Semi-Recessed 2" (51 mm) in wall, projects 6.6875" (170 mm) from wall.
- -11 Surface-Mounted projects 8.6875" (221 mm) from wall.

MODEL 2A15-36

Diplomat Series

Lever operated towel dispenser delivers preset length of towel (5.5" (140 mm) per stroke). Towel dispenser capacity is one standard core 8" (203 mm) W x 8" (203 mm) diameter standard roll paper towels. 21 gal (79.5 L) stainless steel waste receptacle.

Rough wall opening 15.625" W x 54.625" H x 9.875" D (397 x 1387 x 251 mm)

-1036 Semi-Recessed 4" (102 mm) in wall, projects 10.6875" (271 mm) from wall

-1136 Surface-Mounted projects 14.6875" (373 mm) from wall

MODEL 2A25-36

Diplomat Series

Sensor-activated roll paper towel dispenser delivers 10" (254 mm) per operation. Towel dispenser capacity is one standard core 8" (203 mm) W x 8" (203 mm) diameter standard roll paper towels. 21 gal (79.5 L) stainless steel waste receptacle.

Rough wall opening 15.625" W x 54.625" H x 9.875" D (397 x 1387 x 251 mm)

- -1036 Semi-Recessed 4" (102 mm) in wall, projects 10.6875" (271 mm) from wall
- -1136 Surface-Mounted projects 14.6875" (373 mm) from wall

MODEL 2A95-36

Diplomat Series

Designed with unique dual-curve geometry. Constructed of architectural satin finish stainless steel. Designed for field installation of customer-provided towel dispenser. Suggested use with 2494, 2496, and 2497. 21 gal (79.5 L) stainless steel waste receptacle.

Rough wall opening 15.625" W x 54.625" H x 9.875" D (397 x 1387 x 251 mm)

-1036 Semi-Recessed 3.5" (89 mm) in wall, projects 9.3125" (237 mm) from wall


-1136 Surface-Mounted projects 12.8125" (325 mm) from wall

27

Bradley Accessories

Towels & Waste Combination Units





11-1/4" (286 mm)

9" ≜` (229 mm)

1" (25 mm)

9" (229 mm)

53-1/8" (1349 mm)

3-5/8" (92 mm)

4-1/8" (105 mm) 8" (203 mm)

> 35-5/8" (905 mm)

f Towel

27-5/8" (702 mm)

. 13" (330 mm)

55" (1397 mm)

MODEL 2017

Contemporary Series

Constructed of architectural satin finish stainless steel. Dispenses 1,100 single-fold, 800 multi-fold or 600 C-fold towels. Waste receptacle has push-flap door and 4.9 gal (18.5 L), removable, molded-plastic insert.

Rough wall opening 11.75" W x 53.625" H x 5.75" D (298 x 1362 x 146 mm)

- -10 Semi-Recessed 3.5" (89 mm) in wall, projects 2.5" (64 mm) from wall
- -11 Surface-Mounted projects 6" (152 mm) from wall

MODEL 2027



đ


Contemporary Series

Constructed of architectural satin finish stainless steel. Dispenses 800 multi-fold or 600 C-fold towels. Waste receptacle has 3.3 gal (12.5 L), removable, molded-plastic insert.

Rough wall opening 11.75" W x 53.625" H x 3.75" D (298 x 1362 x 146 mm)

- -10 Semi-Recessed 2.375" (60 mm) in wall, projects 2" (51 mm) from wall
- -11 Surface-Mounted projects 4.375" (111 mm) from wall





1/2" (13 mm)

MODEL 2037

Contemporary Series

Constructed of architectural satin finish stainless steel. Dispenses 1,100 single-fold, 800 multi-fold or 600 C-fold towels. Waste receptacle has 11.2 gal (42.4 L), removable, molded-plastic insert.


Rough wall opening 15.75" W x 54.625" H x 7.5" D (400 x 1387 x 191 mm)

- -10 Semi-Recessed 3.75" (95 mm) in wall, projects 4" (102 mm) from wall
- -11 Surface-Mounted projects 7.75" (197 mm) from wall



đ





10-1/2" (267 mm)

39" (991 mm)

14" (356 mm)

58-3/4" (1492 mm)

12" (305 mm)

56-27/32" (1444 mm)

4" (102 mm)

MODEL 225

Constructed of architectural satin finish stainless steel. Adjustable towel guide dispenses 1,000 single-fold, 800 multi-fold or 600 C-fold towels. Waste receptacle has 9.2 gal (34.8 L), removable, leak-proof, molded-plastic insert.

Rough wall opening 12.5" W x 72.75" H x 7.75" D (318 x 1848 x 197 mm)

- -10 Semi-Recessed 3.5" (89 mm) in wall, projects 4" (102 mm) from wall.
- -11 Surface-Mounted projects 7.5" (191 mm) from wall.


MODEL 2251

Constructed of architectural satin finish stainless steel. Dispenses 450 multi-fold or 250 C-fold towels. Waste receptacle has 5.3 gal (20.1 L), removable, molded-plastic insert.

Rough wall opening 12.5" W x 57.34375" H x 4" D (318 x 1457 x 102 mm)

- -10 Semi-Recessed 2" (51 mm) in wall, projects 2" (51 mm) from wall
- -11 Surface-Mounted projects 4" (102 mm) from wall





1/4" (6 mm)

MODEL 2252

Constructed of architectural satin finish stainless steel. Adjustable towel guide dispenses 1,000 single-fold, 700 multi-fold or 400 C-fold towels. Waste receptacle has 4.9 gal (18.5 L), removable, leak-proof, molded-plastic insert.

Rough wall opening 12.5" W x 54.625" H x 7.5" D (318 x 1387 x 191 mm)


- -10 Semi Recessed 3.5" (89 mm) in wall, projects 4" (102 mm) from wall
- -11 Surface Mounted projects 7.5" (191 mm) from wall

3


3

Towels & Waste Combination Units



















MODEL 227

Constructed of architectural satin finish stainless steel. Towel dispenser capacity is one standard core 8" (203 mm) or 9" (229 mm) wide x 800' (243.9 M) long paper towel roll. Waste receptacle is 18 gal (68.1 L) removable stainless steel.

Rough wall opening 15.625" W x 54.625" H x 10.5" D (397 x 1387 x 267 mm)

- -10 Semi-Recessed 3.5" (89 mm) in wall, projects 9.3125" (237 mm) from wall
- -11 Surface-Mounted projects 12.8125" (325 mm) from wall.

MODEL 2271

Unit without Roll Towel Mechanism

Designed for field installation of customer-provided towel dispenser. Suggested use with 2494, 2496 or 2497.

Rough wall opening 15.625" W x 54.625" H x 10.5" D (397 x 1387 x 267 mm)

- -10 Semi Recessed 3.5" (89 mm) in wall, projects 9.3125" (237 mm)
- -11 Surface-Mounted projects 12.8125" (325 mm) from wall

MODEL 2277



Contemporary Series

Constructed of architectural satin finish stainless steel. Dispenses one standard core roll 8" (203 mm) or 9" (229 mm) wide x 800' (243.9 M) long paper towel roll. Waste receptacle has 10.5 gal (37.7 L), removable, molded-plastic insert.

Rough wall opening 15.75" W x 39.5" H x 10.25" D (400 x 1003 x 260 mm)

- -10 Semi-Recessed 3.5" (89 mm) in wall, projects 7" (178 mm)
- -11 Surface-Mounted projects 10.5" (267 mm) from wall.


MODEL 229



Constructed of architectural satin finish stainless steel. Dispenses 200 multi-fold or 100 C-fold towels. Waste receptacle has 1.25 gal (4.7L), removable, stainless steel insert.


Rough wall opening 12.5" W x 16.5" H x 4" D (318 x 419 x 102 mm)

- -10 Semi-Recessed 2" (51 mm) in wall, projects 2" (51 mm) from wall.
- -11 Surface-Mounted projects 4" (102 mm) from wall.



















Constructed of architectural satin finish stainless steel. Dispenses 475 multi-fold or 350 C-fold towels. Waste receptacle has 2 gal (7.6 L), removable, stainless steel insert.

- Rough wall opening 12.5" W x 26.5" H x 4" D (318 x 673 x 102 mm)
- -10 Semi-Recessed 2" (51 mm) in wall, projects 2" (51 mm) from wall.
- -11 Surface-Mounted projects 4" (102 mm) from wall.

MODEL 2297

Contemporary Series

Constructed of architectural satin finish stainless steel. Dispenses 475 multi-fold or 350 C-fold towels. Waste receptacle has 1.7 gal (6.4 L), removable, molded-plastic insert.

Rough wall opening 12.6875" W x 26.625" H x 4" D (322 x 676 x 102 mm)

- -10 Semi-Recessed 1.625" (41 mm) in wall, projects 2.5" (64 mm) from wall
- -11 Surface-Mounted projects 4.125" (105 mm) from wall

MODEL 234



3

BX

H

H

Constructed of architectural satin finish stainless steel. Dispenses 800 multi-fold or 600 C-fold towels. 12 gal (45.4 L), stainless steel waste receptacle is secured with tumbler lock.

Rough wall opening 15.75" W x 54.5" H x 4" D (400 x 1384 x 102 mm)

MODEL 234-35

Hinged Cover

MODEL 234-65

Push-Flap Door Unit

-10 Semi-Recessed 2" (51 mm) in wall, projects 6.75" (171 mm) from wall

-11 Surface-Mounted projects 8.75" (222 mm) from wall.


MODEL 235

Constructed of architectural satin finish stainless steel. Dispenses 800 multi-fold or 500 C-fold towels. Waste receptacle has 4.9 gal (18.5 L), removable, leak-proof, molded-plastic insert.

Rough wall opening 15.75" W x 54.625" H x 4" D (400 x 1384 x 102 mm)

- -10 Semi-Recessed 2" (51 mm) in wall, projects 2" (51 mm) from wall.
- -11 Surface-Mounted projects 4" (102 mm) from wall.







BX

Towels & Waste Combination Units









MODEL 236

Constructed of architectural satin finish stainless steel. Dispenses one standard center-pull towel roll up to 9" (229 mm) wide x 9" (229 mm) diameter. 12 gal (45.4 L), stainless steel waste receptacle.

ð

ð

ð

- Rough wall opening 15.75" W x 54.5" H x 7.5" D (400 x 1384 x 191 mm)
- -10 Semi-Recessed 3.625" (92 mm) in wall, projects 7.875" (200 mm) from wall
- -11 Surface-Mounted projects 11.5" (292 mm) from wall.

DDEL 237
tructed of architectural satin finish stainless steel. Dispenses 1,100 e-fold, 800 multi-fold or 600 C-fold towels. 12 gal (45.4 L), stainless waste receptacle.
h wall opening 15.75" W x 54.5" H x 7.5" D (400 x 1384 x 191 mm)
Gemi-Recessed 3.5" (89 mm) in wall, projects 4" (102 mm) from wall

-11 Surface-Mounted Projects 7.5" (191 mm) from wall

MODEL 237-35

Hinged Cover

MO

Const

single steel \


Rough

-10 S

MODEL 237-65

Push-Flap Door Unit






M	ODEL 238	31
sing	structed of architectural satin finish stainless steel. Dispenses 1,100 le-fold, 800 multi-fold or 600 C-fold towels. 8.2 gal (31 L) waste ptacle, removable, leak-proof, molded-plastic insert.	
Rou	gh wall opening 15.75" W x 54.75" H x 7.5" D (400 x 1391 x 191 mm)	
-10	Semi-Recessed 3.5" (89 mm) in wall, projects 4" (102 mm) from wa	ll
-11	Surface-Mounted projects 7.5" (191 mm) from wall	







Convenient, space-saving 3-in-1 towel dispenser, hand dryer and waste receptacle. Constructed of architectural satin finish stainless steel. Recessed towel dispenser holds 710 single-fold, 500 multi-fold or 370 C-fold paper towels. Waste receptacle has 4.37 gal (16.5 L) capacity. Hand dryer has sensor activation with universal voltage.

Rough wall opening 13" W x 54.25" H x 5.5" D (330 x 1378 x 140 mm)

Unit measures 14.875" W x 56" H x 6.25" D (378 x 1422 x 159 mm)

-10 Semi-Recessed 3.5" (89 mm) in wall, projects 2.75" (70 mm) from wall


-11 Surface-Mounted projects 6.25" (159 mm) from wall

-49 For Export CE certified

Soap Dispensers Wall Mounted

Bradley Soap Dispensers are constructed of stainless steel with exposed surfaces in architectural satin finish. Units feature one-piece, stainless steel flange of welded construction with seamless corners, burr-free edges and 0.25" (6 mm) return to conceal minor wall irregularities. Tumbler locks keyed alike to companion Bradley units.





MODEL 6A00-11

Diplomat Series


Designed with unique dual-curve geometry. Constructed of architectural satin finish stainless steel. Surface-mounted, automatic, liquid soap dispenser with 27 oz (798 ml) capacity. Can also dispense hand sanitizer. Red light indicates low battery.

Unit measures 4.625" W x 10.5625" H x 4.1875" D (117 x 268 x 106 mm)

NEW MODEL 6A01-11

Foam soap dispenser with 27 oz (798 mL) capacity





MODEL 643


Recessed, horizontal, liquid soap dispenser. Stainless steel cabinet with plastic soap vessel. Buna-N check valves to prevent leaking. Slides open for filling. Holds 32 oz (946 ml) liquid soap. Sight gauge on dispenser. Requires less than 5 lb (2.3 Kg) of force to operate.

Rough wall opening 8.5" W x 4.5" H x 4" D (216 x 114 x 102 mm)

MODEL 644	ð
Vertically mounted unit with stainless steel soap vessel	
Rough wall opening 4.5" W x 8.5" H x 4" D (114 x 216 x 102 mm)	
MODEL 646	3
Vertically mounted unit with plastic soap vessel	

Rough wall opening 4.5" W x 8.5" H x 4" D (114 x 216 x 102 mm)





MODEL 6437



BX

BX

3


Contemporary Series

Recessed, liquid soap dispenser of satin-finish stainless steel. Plastic soap vessel holds 32 oz (946 ml) of liquid soap. Sight gauge on dispenser. Requires less than 5 lb (2.3 Kg) of force to operate.


Rough wall opening 8.5" W x 4.5" H x 4" D (216 x 114 x 102 mm)











Surface-mounted, stainless steel with architectural satin finish. Locked cover removes for filling. Holds 44 oz (1301 ml) liquid soap. Push-intype valve delivers measured amount of liquid soap.

Rough wall opening 5.125" W x 7.5" H x 3" D (130 x 191 x 76 mm)

MODEL 6542




Surface-mounted, horizontal, liquid, tank-type soap dispenser of satin finish stainless steel. Holds 40 oz (1183 ml) liquid soap. Push-in-type valve. Concealed mounting. Requires less than 5 lb (2.3 Kg) of force to operate.

Unit measures 8.1875" W x 4.875" H x 2.875" D

Valve projects 2.5" (64 mm) from wall (208 x 124 x 73 mm)





MODEL 6562




Surface-mounted, vertical, liquid, tank-type soap dispenser of satin finish stainless steel. Holds 40 oz (1183 ml) liquid soap. Push-in-type valve. Concealed mounting. Requires less than 5 lb (2.3 Kg) of force to operate.

Unit measures 4.8125" W x 8.1875" H x 2.875" D (122 x 208 x 73 mm)

Valve projects 2.5" (64 mm) from wall





MODEL 6563




Surface-mounted, vertical, liquid, tank-type soap dispenser of stainless steel with black ABS plastic valve. Holds 40 oz (1183 ml) liquid soap. Push-intype valve. Surface mounting. ADA compliant. Requires less than 5 lb (2.3 Kg) of force to operate. Ideal for higher end hospitality and other commercial restrooms.

Unit measures 4.8125" W x 8.1875" H x 2.875" D (122 x 208 x 73 mm)

Valve projects 2.5" (64 mm) from wall







Liquid soap dispenser features chrome-plated bracket, translucent polyethylene globe and push-up-type valve with corrosion-resistant components and vacuum-flow control. Holds 16 oz (473 ml) liquid soap. Swivels for filling

BX

BX

3


Unit measures 3.375" W x 7" H x 5.25" D (86 x 178 x 133 mm)


MODEL 6481

MODEL 650

Unit with no swivel (shown)







2-7/8" (73 mm)

Liquid soap dispenser with push-up-type valve. Translucent polyethylene globe, chrome-plated ABS bracket. Valve is black ABS with stainless steel spring. Unit measures 4" W x 9.5" H x 4.125" D (102 x 241 x 105 mm) Holds 32 oz (946 ml) diagram shown **MODEL 6501**

Unit measures 4" W x 7.875" H x 4.125" D (102 x 200 x 105 mm)

Holds 24 oz (710 ml)

MODEL 655

Liquid, tank-type soap dispenser with vertical valve. Fabricated of stainless steel with exposed surfaces in architectural satin finish. Holds 40 oz (1183 ml) liquid soap. Requires less than 5 lb (2.3 Kg) of force to operate.

Unit measures 4.8125" W x 8.1875" H x 2.875" D (122 x 208 x 73 mm)

MODEL 657


Liquid soap dispenser. Chrome-plated brass with plastic container and chrome-plated plastic assembly. Holds 12 oz (355 ml) liquid soap. Concealed mounting.

Unit measures 3.1875" W x 6" H x 5.875" D (81 x 152 x 149 mm) from wall to end of valve

Valve projects 2.6875" (68 mm) from wall



5-7/8" (149 mm)



6-3/8" (162 mm)

4-13/16" (122 mm)


5-9/32" (134 mm)


1-3/16"

(30 mm)

4 HOLES .213" (5 mm) DIA. COUNTER SUNK FOR #10 FLAT HEAD SCREW



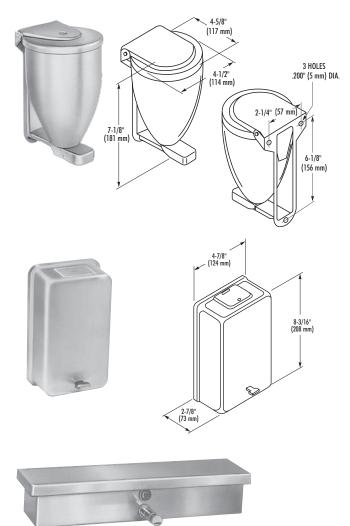



MODEL 658-30

Powdered soap dispenser of polished and satin finish stainless steel. Stainless push knob, springs and discharge mechanism. Holds 32 oz (946 ml) powdered soap. Locked top covers filler hole.

Unit measures 4.5" W x 7.125" H x 4.625" D (114 x 181 x 117 mm)

MODEL 6583

Powdered soap dispenser of satin finished stainless steel with chromeplated brass valve. Holds 32 oz (946 ml) powdered soap. Locked top covers filler hole. Concealed mounting.

Unit measures 4.875" W x 8.1875" H x 2.875" D (124 x 208 x 73 mm)

MODEL 661




Unit measures 17.5" W x 3.25" H x 5.25" D (445 x 83 x 133 mm)

MODEL 662

Unit with two liquid soap valves to mount between two lavatories.

3

ð

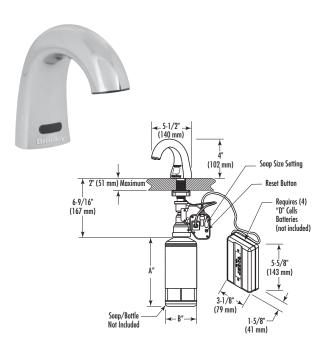

MODEL 6315-KT0000



(Soap Dispenser Starter Kit: 6315, 1 bottle of soap, 4 "D" size batteries.) Sensor-operated soap dispenser with 5.5" (140 mm) spout length. ADA compliant. Reliable Infrared Metering Activation. LED light indicators for low battery and low soap refill. Spout fabricated of chrome-plated plastic. Requires 1" (25 mm) diameter hole in lavatory or countertop 1.5" (38 mm) from edge of sink.

MODEL 6315



Soap Dispenser Only

AC ADAPTOR



P19-231F Single soap dispenser adaptor

P19-231G Adaptor for up to 4 dispensers (need P19-231H for each dispenser)

P19-231H Wire assembly (to be used with P19-231G which requires 1 of these for each dispenser to be hooked up); up to 4 per P19-231G adaptor

P19-232A 2,000-shot non-refillable bottle

P19-232B 1,000-shot non-refillable bottle

MODEL 6322



ð


Liquid soap dispenser with 2.5" (64 mm) spout length. Polyethylene container holds 16 oz (473 ml) liquid soap. Stainless steel plunger and spout. Special key provided. Requires 1" (25 mm) diameter mounting hole. Shank length 4.75" (121 mm) – can be shortened in field. Requires less than 5 lb (2.3 Kg) of force to operate. Spout is fixed.

MODEL 6322-67

Unit with 16-oz (473 ml) stainless steel soap container


MODEL 6322-68	3

Unit with 32-oz (946 ml) polyethylene soap container

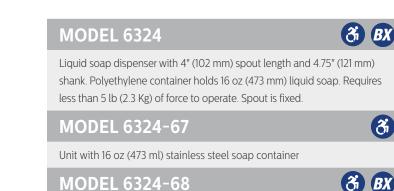

Unit with 32 oz (946 ml) polyethylene soap container






2-1/2"


(64 mm)











___3-1/2"__ (89 mm)

9-1/4" (235 mm)

2-3/8" (60 mm) ♥

MODEL 6326

Liquid soap dispenser with 6" (152 mm) spout length. Polyethylene container holds 16 oz (473 ml) liquid soap. Requires less than 5 lb (2.3 Kg) of force to operate. Spout is fixed.

BX

3

Si BX

3

BX

BX

MODEL 6326-67

Unit with 16 oz (473 ml) stainless steel soap container

MODEL 6326-68

Unit with 32 oz (946 ml) polyethylene soap container

MODEL 6334


Liquid soap dispenser with 3.5" (89 mm) spout length. Polyethylene container holds 16 oz (473 ml) liquid soap. Chrome plated brass plunger and spout. Special key provided. Required 1.25" (32 mm) diameter hole in lavatory or countertop. ADA compliant. Requires less than 5 lb (2.3 Kg) of force to operate.

MODEL 6843

Foot-operated, medical soap dispenser. Housing of ABS plastic with stainless steel spout. Holds 32 oz (946 ml) and unscrews for filling. Foot pump of molded rubber with anti-slip base and 8' (2.4 M) vinyl tubing dispenses surgical liquid soaps, detergents and aseptic solutions with depression of pedal.

Unit measures 11.5" H x 4.5" D (292 x 114 mm)


Spout projects 9" (229 mm) from wall

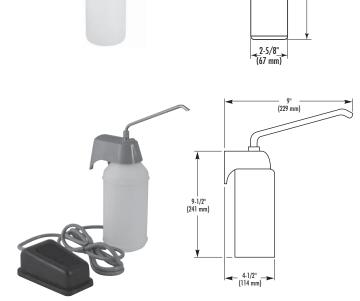

Mirrors & Shelves

Bradley Mirrors are made of first quality 1/4" (6 mm) float glass for a clean, contemporary look and an exclusive backing for long-lasting use. Guaranteed against silver spoilage for 15 years. Frames fabricated of stainless steel with theft-resistant mounting brackets. Angle Frame and Channel Frame Mirrors feature onepiece, roll-formed frames for strength. Frames guaranteed 15 years against corrosion. Choose Angle Frame style for welded, polished corners and Channel Frame Style for neatly mitered corners.





MODEL 780

Angle framed mirror. 0.75" x 0.75" (19 mm x 19 mm) satin finish, stainless steel angle frame with welded and polished corners. 0.25" (6 mm) thick glass. Wall hanger of 18-gauge steel provides theft-resistant mounting. Galvanized steel back plate with shock-absorbing, waterproof filler.

đ

BX

3


BX

Å

BX

Standard or barrier-free applications

See technical data for BradEX sizes




MODEL 7805

Angle framed mirror with shelf. 0.75" x 0.75" (19 mm x 19 mm) satin finish stainless steel angle frame with welded and polished corners. 0.25" (6 mm) thick glass. 5.5" (140 mm) W satin finish stainless steel shelf welded to frame. Shelf has flanged front and sides. Wall hanger of 18-gauge steel provides vandal- and theft-resistant mounting. Galvanized steel back plate with shock-absorbing, waterproof filler.

Standard or barrier-free applications

See technical data for BradEX sizes






MODEL 781

Channel framed mirror. 0.75" x 0.75" x 0.4375" (19 mm x 19 mm x 11 mm) channel frame of stainless steel with bright annealed finish. Neatly mitered corners. 0.25" (6 mm) thick glass. Wall hanger of 18-gauge steel provides vandal- and theft-resistant mounting. Galvanized steel back plate with shock-absorbing, waterproof filler.

Standard or barrier-free applications

See technical data for BradEX sizes





Channel-framed mirror with shelf. 0.75" x 0.75" x .4375" (19 mm x 19 mm x 11 mm) frame of stainless steel with bright annealed finish. Neatly mitered corners. 0.25" (6 mm) thick glass. 5.5" (140 mm) W satin finish stainless steel shelf welded to frame. Wall hanger of 18-gauge steel provides vandal- and theft-resistant mounting. Galvanized steel back plate with shock-absorbing, waterproof filler.

ð

BX

3

BX

3

F

Standard or barrier-free applications

See technical data for BradEX sizes



See technical data for BradEX sizes

MODEL 7405

HEIGHT

-3/4" (19 mm)

WIDTH


Fixed-angle, tilt mirror with integral welded stainless steel shelf. 0.75" x 0.75" (19 mm x 19 mm) frame with welded and polished corners. 0.25" (6 mm) thick glass. Shelf is 5.5" (140 mm) W, welded to frame, flanged front and sides with welded, polished corners. Theft-resistant mounting bracket.


Standard or barrier-free applications

MODEL 782


Adjustable tilt mirror. 0.75" x 0.75" (19 mm x 19 mm) frame is bottom hinged and has welded, polished corners. 0.25" (6 mm) thick glass. Two friction elbow hinges on top allow unit to tilt up to maximum 6" (152 mm) from wall. Standard projection is 4" (102 mm).

Standard or barrier-free applications



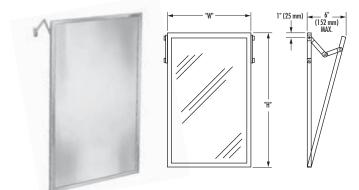





WIDTH

(4) MOUNTING HOLES

3/4 (19 m

3/4" (19 mm)

3/4" (19 mm)

HEIGHT

3/4" (19 mm)



MODEL 747F

Frosted, frameless mirror with first quality 0.25" (6 mm) thick glass mirror. Metal clip fasteners. Only available in standard glass.

-S Solid Acid-Etched Border

MODEL 748

Unbreakable stainless steel, frameless mirror of stainless steel polished to No. 8 architectural bright finish. Mirror has 0.25" (6 mm) return to conceal 0.25" (6 mm) tempered Masonite backing. Fastens with tamper-resistant screws.

Standard or barrier-free applications

MODEL 7481	ð
In bright annealed stainless steel.	
Standard or barrier-free applications	
See technical data for BradEX sizes	BX

Optional Features


Options available on select Bradley models.

Feature	Add Suffix
🛿" (6mm) Tempered glass mirror	-2
Laminated glass mirror	-3
300 Series stainless steel polished to a No. 8 architectural-grade finish in lieu of glass	-4
400 Series bright annealed stainless steel in lieu of glass	-5
Plexiglass mirror	-6

Note: Tempered, laminated, plexiglass and stainless steel provide extra security from broken glass but may differ in color and reflectivity from standard mirrors.



F



Surface-mounted shelves fabricated of stainless steel with exposed surfaces in architectural satin finish.

BX

BX

5" (127 mm) Width

-12 12" (305 mm) Length

-18 18" (457 mm) Length

MODEL 756

6" (152 mm) Width

MODEL 758

8" (203 mm) Width

-24 24" (610 mm) Length

MODEL 760

Recessed shelf shall be fabricated of 22 gauge stainless steel with exposed surfaces in satin finish.

Unit measures 19.5" W x 10" H x 4" D (495 x 254 x 102 mm)

MODEL 7510

Surface-mounted shelves fabricated of stainless steel with exposed surfaces in architectural satin finish.

10" (254 mm) Width

MODEL 7512

12" (305 mm) Width


MODEL 790


Surface-mounted, fold-down utility shelf. Fabricated of **heavy-duty**, **chrome-plated zinc die cast** with textured shelf area. Rear hinged shelf folds down for use. Holds up to 150 lb (68 Kg). Automatically returns to vertical position.

Unit measures 5" W x 14.875" D (127 x 378 mm)


-SS Stainless Steel












BX

Toilet Tissue Dispensers

Bradley Toilet Tissue Holders and Seat Cover Dispensers provide a complete selection of surface-mounted, recessed and partition-mounted units. Toilet Tissue Holders are available in single and multi-roll models, some with integral shelves.





5-11/16"

10-7/8"

(276 mm)

MODEL 5A00



3 BX

ð

Diplomat Series

Designed with unique dual-curve geometry. Constructed of architectural satin finish stainless steel. Recess-mounted, non-controlled delivery toilet tissue holder. Cabinet holds two rolls up to 4.5" (114 mm) W x 5.25" (133 mm) diameter standard core toilet tissue. Molded polyethylene spindles.

Rough wall opening 6" W x 11.125" H x 4" D (152 x 283 x 102 mm)







Diplomat Series


Designed with unique dual-curve geometry. Constructed of architectural satin finish stainless steel. Surface-mounted, non-controlled delivery toilet tissue holder. Cabinet holds two rolls up to 4.5" (114 mm) W x 5.25" (133 mm) diameter standard core toilet tissue. Molded polyethylene spindles.

Unit measures 5.5625" W x 10.875" H x 6.1875" D (141 x 276 x 157 mm)









– 4-1/4" -(108 mm)

4-1/4" to 4-3/4" - (108 mm to 121 mm)

MODEL 5A20

Diplomat Series


Designed with unique dual-curve geometry. Constructed of architectural satin finish stainless steel. Partition-mounted, non-controlled delivery toilet tissue holder. Double-sided unit includes single-roll dispenser with roll-in-reserve serving each compartment. Each cabinet holds two rolls up to 4.5" (114 mm) W x 5.25" (133 mm) diameter standard core toilet tissue. Molded polyethylene spindles.

Rough wall opening 11.125" H x 11.5" W (283 x 292 mm)


MODEL 5061

Controlled delivery with vandal-resistant locking device and constant roll tension. Exclusive adjusting mechanism accommodates rolls from 4.25" (108 mm) W to 4.75" (121 mm) W. Holds one standard core roll through 6" (152 mm) in diameter. Surface mounted.

Unit measures 5.875" W x 2.75" H x 5" D (149 x 70 x 127 mm)





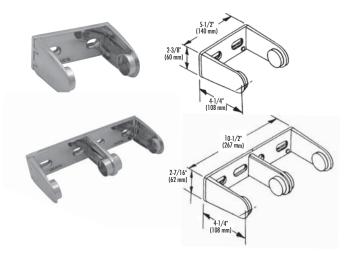

Controlled delivery. Chrome-plated, die-cast zinc. Unit features hinged arm with spring catch for filling and tension spring on fixed arm. Holds one (two) standard core roll(s) through 5" (127 mm) in diameter and 4.5" (114 mm) wide. Surface mounted.

BX

BX

BX

BX

BX


Single Roll

Unit measures 5.5" W x 2.375" H x 4.25" D (140 x 60 x 108 mm)

MODEL 522

Double Roll

Unit measures 10.5" W x 2.4375" H x 4.25" D (267 x 62 x 108 mm)



MODEL 5053

Controlled delivery. Epoxy-coated aluminum. One-piece construction with hinged arm and snap lock, which is concealed by tissue roll. No removable parts. Surface mounted.

Single Roll

Unit measures 5.125" W x 2" H x 3.125" D (130 x 51 x 79 mm)

MODEL 5054

Controlled delivery. Heavy-duty, chrome-plated steel. Vandalresistant locking mechanism. Hinged arm for filling. Tension spring prevents free spinning of roll. Holds one (two) standard core roll(s) through 6" (152 mm) in diameter. Surface mounted.

Single Roll

Unit measures 6" W x 2.75" H x 4.5" D (152 x 70 x 114 mm)

MODEL	5224


Double Roll


Unit measures 12.375" W x 2.75" H x 4.3125" D (314 x 70 x 110 mm)


MODEL 5061

Single Roll


Chrome-plated Zinc




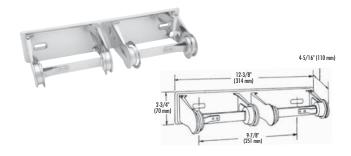






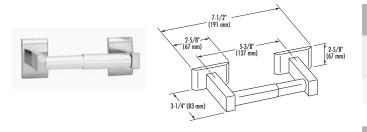





Controlled delivery. Die-cast aluminum with gray polystyrene spindle. Rotates 0.5 revolution for each dispensing operation and returns to original position. Spring allows spindle to be released for filling. Holds one (two) standard core roll(s) through 5.5" (140 mm) in diameter. Surface mounted.

Single Roll

Unit measures 6.5" W x 1.75" H x 4" D (165 x 44 x 102 mm)

-50 Non-controlled Delivery

MODEL 5241

Double Roll

Unit measures 13" W x 1.75" H x 4.25" D (330 x 44 x 108 mm)

-50 Non-controlled Delivery

THEFT-RESISTANT SPINDLE (-52)

Available as an option for Bradley surface-mounted and recessed toilet tissue holders.

Option -52 can be ordered as a replacement part #S01-459

MODEL 508*



BX

BX

Non-controlled delivery. Chrome-plated, cast brass with chromeplated plastic spindle. Surface mounted.

Unit measures 7.5" W x 2.625" H x 3.25" D (191 x 67 x 83 mm)

MODEL 5084*



Non-controlled delivery. Constructed of satin-finish stainless steel. Unit has individually mounted arms and free-turning roller that telescopes for filling. Holds standard core rolls through 5.5" (140 mm) in diameter. Surface mounted.

Single Roll

Unit measures 7.75" W x 2" H x 3.625" D (197 x 51 x 92 mm)

Single roll, unit with Bright Polish Finish.

BX

(Ĉi) BX

H BX

Double Roll

Unit measures 13" W x 2" H x 3.875" D (330 x 51 x 98 mm)

MODEL 5235*


MODEL 5085*


MODEL 5234*

Double roll, unit with Bright Polish Finish

*Theft-resistant spindle available (-52)

BX icon indicates BradEX®



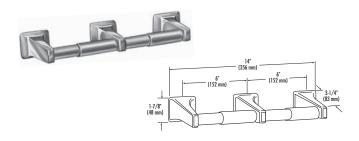

MODEL 508-32*

3

BX

3

BX

3

BX

Non-controlled delivery. Highly polished, chrome-finish Zamac brackets with plated-steel mounting bracket and chrome-plated plastic spindle. Surface mounted.

Single Roll

Unit measures 7.75" W x 2" H x 3.375" D (197 x 51 x 86 mm)

Plastic roller (-51) for 508-32 only

MODEL 523*

Double Roll

Unit measures 14" W x 1.875" H x 3.375" D (356 x 48 x 86 mm)

MODEL 5106*

Surface-mounted, non-controlled delivery with hinged hood. Fabricated of bright polished stainless steel and chrome-plated plastic spindle. Free-turning rollers. Holds standard core rolls through 5.5" (140 mm) in diameter.

Single Roll

Unit measures 6.375" W x 6.375" H x 2" D (162 x 162 x 51 mm)

MODEL 5126*

Double Roll

Unit measures 12.625" W x 6.375" H x 2" D (321 x 162 x 51 mm)

MODEL 5262


Toilet tissue dispenser with shelf. Non-controlled delivery. Fabricated of satin-finish stainless steel. Spindle(s) of ABS plastic with concealed spring. Standard core 6" (152 mm) diameter toilet tissue roll(s). Surface mounted.

Single Roll


Unit measures 16" W x 3.9375" H x 6" D (406 x 100 x 152 mm)

MODEL 5263


Double Roll














5-13/16" (148 mm)

7/16" (11 mm) TYP.

VIEWING SLOT

11-3/8" (289 mm)

MODEL 5424



Surface-mounted, jumbo-roll, toilet tissue holder. Satin-finish stainless steel. Door swings down to replenish tissue roll and is secured with tumbler lock. Holds one roll (up to 10" (254 mm) diameter) of 1.5" (38 mm) or 2.125" (54 mm) diameter core toilet tissue minimum. Refill indicator slot reveals tissue level.

Unit measures 10.8125" W x 10.8125" H x 4.75" D (275 x 275 x 121 mm)

MODEL 5425



Surface-mounted, dual-jumbo-roll, toilet tissue holder. Satin-finish stainless steel. Bottom hinged front panel is secured with tumbler lock. Holds two standard 9" (229 mm) rolls. Core adapters accept 2.25" (57 mm) or 3" (76 mm) diameter core tissue minimum. Inside mechanism of durable ABS has sliding bottom access panel to allow dispensing from one roll at a time. Non-controlled delivery.

Unit measures 20.5625" W x 11.375" H x 6" D (522 x 289 x 152 mm)

MODEL 5402



Surface-mounted, dual-roll, toilet tissue holder. Satin-finish stainless steel. Vandal-resistant, polyethylene spindles. Bottom hinged front panel is secured with tumbler lock. Holds two standard rolls up to 4.75" (121 mm) in diameter, 4.5" (114 mm) W. Non-controlled delivery.

Unit measures 5.5625" W x 10.375" H x 5" D (141 x 264 x 127 mm)

MODEL 5104*



F

3

Recess-mounted toilet tissue holder with non-controlled delivery. Recessed housing and projecting parts of satin finish stainless steel. Free-turning, chrome-plated plastic roller telescopes for filling. Holds one standard core roll up to 5" (127 mm) in diameter. Satin Finish (shown)

Rough wall opening 5.25" W x 5.25" H x 2" D (133 x 133 x 51 mm)




Unit Housing and Projecting Parts of Bright Polished Stainless Steel*

MODEL 510*

Chrome-Plated Brass Unit

*Theft-resistant spindle available (-52)






- 4-7/16" (113 mm) TYP.

SLIDING MECHANISM


0






BX icon indicates BradEX⁴



















MODEL 5103*

Recess-mounted toilet tissue holder with hinged hood and noncontrolled delivery. Housing brackets and hood fabricated of bright polished stainless steel. Chrome-plated plastic spindle. Holds one (two) standard core roll(s) through 5.5" (140 mm) in diameter.

Single Roll

Rough wall opening 5" W x 4.875" H x 1.875" D (127 x 124 x 48 mm)

MODEL 5123*

Double Roll

Rough wall opening 11.75" W x 5.25" H x 2" D (298 x 133 x 51 mm)

MODEL 5105*

Recess-mounted toilet tissue holder with non-controlled delivery. Housing fabricated of bright polished stainless steel. Posts are fabricated of chrome-plated zinc. Spindle fabricated of chrome-plated plastic. Holds one standard core toilet tissue roll through 5" (127 mm) in diameter, plus one spare roll behind spindled roll.

Rough wall opening 5.25" W x 5.25" H x 4" D (133 x 133 x 102 mm)

MODEL 5124*

Recess-mounted, dual-roll, toilet tissue holder with non-controlled delivery. Satin-finish stainless steel. Chrome-plated, zinc die-cast projecting parts. Free-turning, chrome-plated plastic rollers. Holds two standard core rolls through 5" (127 mm) in diameter.

Rough wall opening 11.75" W x 5.25" H x 2" D (298 x 133 x 51 mm)

MODEL 5125*

Unit with Bright Polish Finish

MODEL 5127

BX

Recess-mounted, dual roll, non-controlled delivery with hinged hood toilet tissue holder. Fabricated of bright polished stainless steel and chrome-plated plastic spindle. Free-turning rollers. Holds standard core through 5.5" (140 mm) diameter.

Unit measures 6.5" W x 12.25" H x 3" D (165 x 311 x 76 mm)

Rough wall opening 6" W x 11.75" H x 3.25" D (152 x 298 x 83 mm)


3

BX

Å

*Theft-resistant spindle available (-52)






3

H


F


Toilet Tissue Dispensers











MODEL 515

Dispenses sheet tissue. Satin-finish stainless steel. Front panel hinged at bottom. Vandal-resistant lock.

Unit measures 5" W x 8" H x 3" D (127 x 203 x 76 mm)

MODEL 5412

ði BX

ð

Recess-mounted, dual-roll, toilet tissue holder. Satin-finish stainless steel. Vandal-resistant polyethylene spindles. Bottom hinged front panel is secured with tumbler lock. Holds two standard rolls up to 4.75" (121 mm) in diameter, 4.5" (114 mm) W. Non-controlled delivery.

With flange, unit measures 7.625" W x 12.375" H x 5.3125" D (194 x 314 x 135 mm) Without flange, unit measures 5.625" W x 10.375" H x 5.3125" D (143 x 264 x 135 mm)

Rough wall opening 5.75" W x 10.5" H x 4" D (146 x 267 x 102 mm)

MODEL 5422



Partition-mounted, dual-roll, toilet tissue holder. Serves two adjoining compartments. Satin-finish stainless steel. Vandal-resistant polyethylene spindles. Bottom hinged front panel is secured with tumbler lock. Holds two standard rolls up to 4.75" (121 mm) in diameter, 4.5" (114 mm) W. Noncontrolled delivery.


With flange, unit measures 13" W x 12.375" H x 5.71875" D (330 x 314 x 145 mm) Without flange, unit measures 11" W x 10.375" H x 5.09375" D (279 x 264 x 129 mm)


Partition opening 11.375" W x 10.625" H (289 x 270 mm)



Bradley Seat Cover Dispenser/Combination units are fabricated of 18-gauge stainless steel and are secured with fulllength piano hinges and tumbler locks for the ultimate blend of style and vandal resistance. When doors are locked, contents and interior areas are hidden and protected. Partition-mounted units serve two compartments at the same time.







17-1/8" (435 mm)

Napkin Disposa

_15-1/8" (384 mm

30-5/8" (778 mm)

Seat Cover Dispenser

∋ Grab Bar

Toilet Tissue Spindle (2)

1" (25 mm)

MODEL 591



3

Partition-mounted combination unit serves two compartments. Dispenses 1,000 standard single or half-fold paper toilet seat covers. Holds four standard core rolls through 5.25" (133 mm) in diameter. Waste receptacle capacity 0.88 gal (3.3 L). Noncontrolled delivery.

Partition opening 15.5" W x 28.875" H (394 x 733 mm)

MODEL 5911

Partition-mounted combination unit serves two compartments. Mounts with one side flush against partition allowing clearance for grab bar in barrier-free compartment. Waste receptacle capacity 0.88 gal (3.3 L). Holds four standard core rolls through 5.25" (133 mm) in diameter. Non-controlled delivery. Servicing of unit accomplished from non-barrier-free compartment.

Partition opening 15.5" W x 28.875" H (394 x 733 mm)

-69 Reverse Door Option

MODEL 5912



Recess-mounted combination unit. Dispenses 1,000 standard single or half-fold paper toilet seat covers. Holds two standard core rolls through 5.25" (133 mm) in diameter. Non-controlled delivery. Waste receptacle capacity 1 gal (3.8 L).


Rough wall opening 15.5" W x 28.875" H x 4" D (394 x 733 x 102 mm)

-10 Semi-Recessed Projects 1.25" (32 mm) from wall. Not for use with grab bar

-11 Surface-Mounted Projects 4.25" (108 mm) from wall. Not for use with grab bar

-69 Reverse Door Option






MODEL 592

Partition-mounted combination unit serves two compartments. Dispenses 1,000 standard single or half-fold paper toilet seat covers. Holds four standard core rolls through 5.25" (133 mm) in diameter. Non-controlled delivery.

Partition opening 15.5" W x 28.875" H (394 x 733 mm)

3





17-1/8" (435 mm)

30-5/8" (778 mm) Seat Cover Dispenser

> ⊖ Grab Bar (Not Furnished)

Toilet Tissue Spindle (2)

- | | →- 1" (25 mm) Tvn

MODEL 5921



Partition opening 15.5" W x 28.875" H (394 x 733 mm)

-69 Reverse Door Option

MODEL 5922



Å

ð

3

Recess mounted. Dispenses 1,000 standard single or half-fold paper toilet seat covers. Holds two standard core rolls through 5.25" (133 mm) in diameter. Non-controlled delivery.

Rough wall opening 15.5" W x 28.875" H x 4" D (394 x 733 x 102 mm)

-10 Semi-Recessed 2.125" (54 mm) in wall, projects 2" (51 mm) from wall. Not for use with grab bar.

-11 Surface-Mounted Projects 4.25" (108 mm) from wall. Not for use with grab bar.

-69 Reverse Door Option

MODEL 5932

Recess-mounted combination unit. Dispenses 1,000 standard single or half-fold paper toilet seat covers. Waste receptacle capacity 1.7 gal (6.4 L).

Rough wall opening 15.5" W x 28.875" H x 4" D (394 x 733 x 102 mm)

-10 Semi-Recessed

-11 Surface-Mounted


MODEL 594

Partition-mounted combination unit serves two compartments. Dispenses four standard core rolls through 5.25" (133 mm) in diameter, two rolls per compartment. Non-controlled delivery. Waste receptacle capacity 1 gal (3.8 L).

Partition opening 15.5" W x 18.25" H (394 x 464 mm)








_ 15-1/8" . (384 mm)




52











20" 17-1/8" 20" (435 mm) 20" Image: Constraint of the second sec

MODEL 5941

Partition-mounted combination unit shall include toilet tissue dispenser, and napkin disposal, and be fabricated of, heavy gauge stainless steel with seamless exposed surfaces in satin finish. Door and back panel shall be 18 gauge. Door shall have piano hinge and tumbler lock.

đ

3

H

ð

Overall dimensions: 17.125" W x 20" H x 4.5" D (435 x 508 x 114 mm)

MODEL 5942


Recess-mounted combination unit. Dispenses two standard core rolls through 5.25" (133 mm) in diameter. Non-controlled delivery. Napkin disposal has self-closing, push-flap door. Waste receptacle capacity 1 gal (3.8 L).

Rough wall opening 15.375" W x 18.25" H x 4.25" D (391 x 464 x 108 mm)

-10 Semi-Recessed 3.25" (83 mm) in wall, projects 1.25" (32 mm) from wall.

- -11 Surface-Mounted Projects 4.5" (108 mm) from wall.
- -69 Reverse Door Option






MODEL 5951

Recessed combination unit shall include dual jumbo coreless toilet tissue dispenser and napkin disposal, and be fabricated of stainless steel with seamless exposed surfaces in satin finish. Doors shall be 18 gauge, 304 stainless steel, with piano hinge and tumbler lock.


Overall dimensions: 34.75" W x 20.5" H x 6.25" D (883 x 521 x 159 mm)

MODEL 5952


Right hand configuration

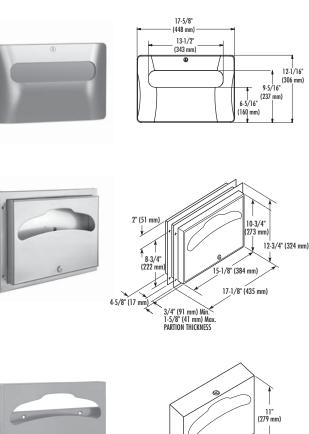














MODEL 5A40-11



Diplomat Series

Designed with unique dual-curve geometry. Constructed of architectural satin finish stainless steel. Surface-mounted seat cover dispenser. Dispenses 250 standard single or half-fold paper toilet seat covers.

Unit measures 17.625" W x 12.0625" H x 1.75" D (448 x 306 x 44 mm)

MODEL 582



ð

3 BX

BX

Partition-mounted seat cover dispenser serves two compartments. Dispenses 1,000 single-fold or half-fold paper seat covers.

Partition opening 11" H x 15.375" W (279 x 391 mm)

MODEL 583

Surface-mounted seat cover dispenser. Dispenses 500 standard single or half-fold paper toilet seat covers. Does not lock.

Unit measures 15" W x 11.5" H x 2.375" D (381 x 292 x 60 mm)

MODEL 5831

Unit dispenses 250 toilet seat covers (shown)

Unit measures 15.75" W x 11" H x 2" D (400 x 279 x 51 mm)

MODEL 584



Recess-mounted seat cover dispenser. Dispenses 500 standard single or half-fold paper toilet seat covers.

Rough wall opening 15.75" W x 11.375" H x 2.75" D (400 x 289 x 70 mm)

MODEL 5847




Contemporary Series

Recess-mounted, seat cover dispenser. Dispenses 500 standard single or half-fold toilet seat covers.

Rough wall opening 15.625" W x 11.25" H x 2.75" D (397 x 286 x 70 mm)







8" (203 mm)

MODEL 4A00



BX

Diplomat Series

Designed with unique dual-curve geometry. Constructed of architectural satin finish stainless steel. 1.5 gal (5.7 L), recess-mounted napkin disposal with push-flap door. Removable plastic disposal.

Rough wall opening 11.25" W x 13.75" H x 4" D (286 x 349 x 102 mm)

-10 Semi-Recessed 2" (51 mm) in wall, projects 3.75" (95 mm) from wall

MODEL 4A10-11

	6

Diplomat Series

Designed with unique dual-curve geometry. Constructed of architectural satin finish stainless steel. 1.5 gal (5.7 L), surfacemounted napkin disposal with hinged cover. Accepts all after-market industry liners.

Unit measures 8" W x 10.0625" H x 3.875" D (203 x 256 x 98 mm)

MODEL 4A11



Diplomat Series

Designed with unique dual-curve geometry. Constructed of architectural satin finish stainless steel. Mounts in partition to serve two compartments. 1.5 gal (5.7 L) napkin disposal with self-closing push-flap door. Removable plastic disposal.

Rough wall opening 11.25" W x 13.75" H (286 x 349 mm)

MODEL 4721-15

ði BX

Mounts in partition to serve two compartments. Two push-flap doors and stainless steel waste receptacle removable from one side. Flange adjusts for partitions from 0.5" (13 mm) to 1.25" (32 mm) thick. Uses disposable, wet-strength paper liner. 1.5 gal (5.7 L) capacity.

Partition opening 11" W x 15.375" H (279 x 391 mm)

Note: If used with an odd number of compartments, use one Model 4722-15 in side wall of end compartment

MODEL 4722-1015


Semi-recessed napkin disposal unit with push-flap door and removable, stainless steel receptacle. Uses disposable, wet-strength paper liner.

Rough wall opening 11" W x 15.375" H x 2.5" D (279 x 391 x 64 mm)

Unit projects 1.4375" (37 mm) from finished wall.









10-1/16"

(256 mm)











Napkin Disposals






















MODEL 4722-15



Surface-mounted napkin disposal unit with push-flap door and removable, stainless steel receptacle. Uses disposable, wet-strength paper liner.

Measures 10.75" W x 15.125" H x 4" D (273 x 384 x 102 mm)

MODEL 4731-15



Å

Recess-mounted napkin disposal unit with push-flap door and removable, stainless steel receptacle. Uses disposable, wetstrength paper liner. May also be used as a small-capacity waste receptacle.

Rough wall opening 11.375" W x 15.375" H x 4" D (289 x 391 x 102 mm)

Unit projects 1.4375" (37 mm) from finished wall

MODEL 4737

Contemporary Series

Recess-mounted napkin disposal with push-flap door. Removable, leak-proof, molded-plastic insert.

Rough wall opening 11.375" W x 15.375" H x 4" D (289 x 391 x 102 mm)

-10 Semi-Recessed 2.125" (54 mm) in wall, projects 2" (51 mm) from wall.

-11 Surface-Mounted Projects 4.125" (105 mm) from wall.

Note: Only recessed and semi-recessed.

MODEL 4781-15



Surface-mounted napkin disposal unit has hinged cover and bottom with lock. Uses disposable, wet-strength paper liner.

Unit measures 8" W x 11.5" H x 4.125" D (203 x 292 x 105 mm)

MODEL 4791-15


Surface-mounted napkin disposal with integral shelf has hinged cover and bottom with tumbler lock. Shelf welded to waste receptacle. Uses disposable, wet-strength paper liner.

Unit measures 16" W x 11.25" H x 4.125" D (406 x 286 x 105 mm)



All Bradley dispensers combine smooth, contemporary styling with durable, vandal-resistant construction. Doors feature full-length piano hinges and tumbler locks for added security and maintenance ease. Configurations range from semi-recessed and recessed to surface-mounted and partition-mounted models.





11-7/8" 302 mm

60

25-7/8" (657 mm Φ

27-15/16" (710 mm)

> т 5-3/4" (146 mm)

MODEL 4A20

Diplomat Series

Designed with unique dual-curve geometry. Constructed of architectural satin finish stainless steel. Recess-mounted napkin/tampon vendor. Dispenses 18 napkins and 28 tampons. Specify coin choice (Free, 10¢, 25¢, 50¢, \$1.00 and Euro).

Rough wall opening 16.125" W x 27.875" H x 4" D (410 x 708 x 102 mm)

-11 Surface-Mounted Projects 5⊠" (146 mm) from wall.

-45 25¢ Coin Operation

MODEL 401

Recessed napkin/tampon vendor. Dispenses 30 napkins and 28 tampons. Slip-type flange permits full or partial recess installation or can be discarded for surface mounting. Coin mechanism may be replaced in the field without removing cabinet from wall. Specify coin choice (Free, 10c, 25c, 50c, \$1.00).

Rough wall opening 12.5" W x 26.375" H x 6" D (318 x 670 x 152 mm)

-45 25¢ Coin Operation

MODEL 4017

Contemporary Series

Recessed napkin/tampon vendor. Dispenses 30 napkins and 28 tampons. Full-length piano hinge and two tumbler locks. Coin mechanism may be replaced in the field without removing cabinet from wall. Specify coin choice (Free, 10c, 25c, 50c, \$1.00).


Rough wall opening 12.5" W x 26.375" H x 6.5" D (318 x 670 x 165 mm)

- -10 Semi-Recessed 4" (102 mm) in wall, projects 2" (51 mm) from wall
- **-11** Surface-Mounted Projects 6^[]" (171 mm) from wall
- -45 25¢ Coin Operation

BX

BX





MODEL 407

Contemporary Series

Recessed napkin/tampon vendor. Dispenses 18 napkins and 28 tampons. Shallow design permits unit to be fully recessed in a standard 4" (102 mm) deep wall. Coin mechanism may be replaced in the field without removing cabinet from wall. Specify coin choice (Free, 10c, 25c, 50c, \$1.00).


Rough wall opening 16.125" W x 27.875" H x 4" D (410 x 708 x 102 mm)

- -11 Surface-Mounted Projects 43/8" (111 mm) from wall.
- -45 25¢ Coin Operation

-1145 Surface-Mounted with 25¢ Coin Operation


BX BX
















Recess-mounted unit with polyethylene body and barrier-free design. Brushed stainless steel exterior. Standard with molded, dual-liner dispenser (holds approximately 50 per dispenser). Safety belt with cambuckle is adjustable with one hand. Pneumatic gas shock mechanism ensures smooth, safe open and close motions. Rated to support static load of 250 lb (113.4 Kg).

MODEL 962-11



Surface-Mounted

4-5/8" (117 mm)






MODEL 963



Si BX


Bacterial resistant high density polyethylene with steel to steel support hinges. Pneumatic gas shock mechanism opens and closes unit smoothly. Liner dispenser and purse.diaper bag hooks molded in. Nylon buckle is adjustable with one hand. Gray and White Speckled



Solid Light Gray Color


MODEL 9632

Ivory Color













Hinged corner shower seat. Heavy-duty, satin-finish, stainless steel with 0.75" (19 mm) return edges. Folds to vertical position when not in use.

MODEL 9541

Fixed Corner Shower Seat

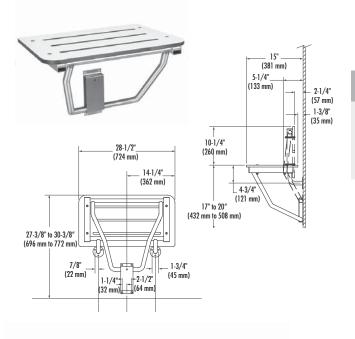



MODEL 9562

Folding, phenolic shower seat. Stainless steel tubing with stainless steel wall bracket and piano hinges. Seat of 0.5" (13 mm) solid phenolic. Folds to vertical position when not in use. Designed to support up to 400 lb (181.4 Kg) static load.

MODEL 9569



(ð


BX

Frame fabricated with satin-finish, stainless steel, 16-gauge U-channel and 18-gauge 1" (25 mm) diameter tubing. Seat constructed of 0.5" (13 mm) thick solid phenolic with white matte melamine finish. Reversible in field to be right or left. Barrier-free design. For color options, please see website. When properly installed, designed to support up to 250 lb (113.4 Kg) static load.

Reversible – Accommodates Right or Left Hand Configuration



17" (432mm) 8½" (216mm) 27¼" to 30¼" (692mm to 768mm) ‰" 13⁄4' (22mm) (45mm) 21/5 114' 2mm _{5"}77 11 /// (125mm)-97/8" (251mm)



MODEL 9591

Folding, phenolic shower seat. Stainless steel tubing with stainless steel wall bracket and piano hinges. Seat of 0.5" (13 mm) solid phenolic. Folds to vertical position when not in use. Designed to support up to 250 lb (113.4 Kg) static load.

MODEL 9592

5¼" (133mm)

· 1¾" 44mm)


• 1%" (35mm)



3


Folding, Bradmar[™] solid plastic shower seat. Stainless steel tubing with stainless steel wall bracket and piano hinges. Seat of 1" (25 mm) thick high-density polyethylene. All exposed edges are machined smooth. Square configuration. Folds to vertical position when not in use. Designed to support up to 250 lb (113.4 Kg) static load.

Color: Linen cobblestone with textured finish.

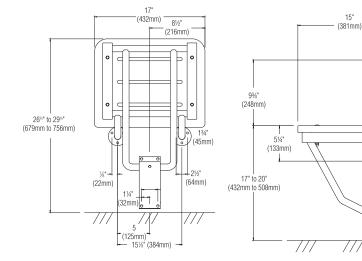





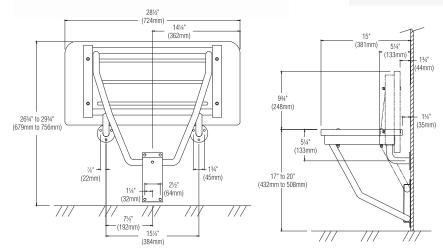

Folding, Bradmar'' solid plastic shower seat. Stainless steel tubing with stainless steel wall bracket and piano hinges. Seat of 1" (25 mm) thick high-density polyethylene. All exposed edges are machined smooth. Square configuration. Folds to vertical position when not in use. Designed to support up to 400 lb (181.4 Kg) static load.

Color: Linen cobblestone with textured finish.



MODEL 9594


3


ð

Folding, Bradmar solid plastic shower seat. Stainless steel tubing with stainless steel wall bracket and piano hinges. Seat of 1" (25 mm) thick high-density polyethylene. All exposed edges are machined smooth. Square configuration. Folds to vertical position when not in use. Designed to support up to 250 lb (113.4 Kg) static load.


Color: Linen cobblestone with textured finish.

Reversible – Accommodates Right or Left Hand Configuration










Folding bariatric shower seat with left hand configuration and barrierfree design. Frame fabricated of stainless steel tubing, 1.25" (32 mm) x 18-gauge square main frame with 1" (25 mm) x 18-gauge round cross members. Seat of 0.5" (13 mm) thick solid phenolic with white matte melamine finish. When properly installed, designed to support at least 900 lb (408.2 Kg).

MODEL 9571

Right Hand Configuration

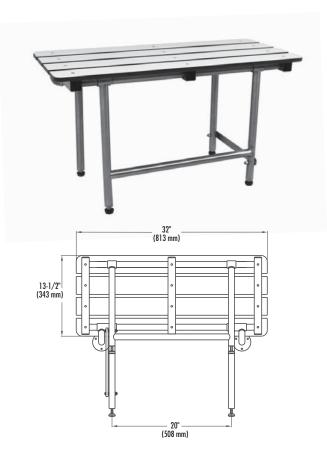

MODEL 958

Bariatric Bench Shower Seat


Folding bariatric shower seat with barrier-free design. Frame fabricated of stainless steel tubing, 1.25" (32 mm) x 18-gauge square main frame with 1" (25 mm) x 18-gauge round cross members. Seat of 0.5" (13 mm) thick solid phenolic with white matte melamine finish. When properly installed, designed to support at least 900 lb (408.2 Kg).



BX

Shower Products Curtains, Hooks & Rods







MODEL 9533

BX

Vinyl shower curtain. Fabricated of 6-gauge vinyl material. Hemmed edges and heat-sealed grommets on 6" (152 mm) centers. White is standard.

Sizes: 36" x 72" (914 x 1829 mm) 42" x 72" (1067 x 1829 mm) 48" x 72" (1219 x 1829 mm) 60" x 72" (1524 x 1829 mm) 72" x 72" (1829 x 1829 mm) See technical data on website for other stocked sizes

MODEL 9534

Duck shower curtain. Fabricated of 100% cotton duck material with hemmed top edges and chrome-plated nickel grommets on 6" (152 mm) centers. White only.

MODEL 9535

Antimicrobial shower curtain. Fabricated of 10 oz (10 mil), nylonreinforced, antimicrobial, 8-gauge vinyl material. Flame resistant and self deodorizing with rust-proof grommet on 6" (152 mm) centers. All sides hemmed. Green is standard.

MODEL 9537

Same as model 9535 shower curtain in white

Sizes: 36" x 72" (914 x 1829 mm) 42" x 72" (1067 x 1829 mm) 48" x 72" (1219 x 1829 mm) 60" x 72" (1524 x 1829 mm) 72" x 72" (1829 x 1829 mm) See technical data on website for other stocked sizes

MODEL 9536

BX

BX

BX


Shower curtain hook. Fabricated of stainless steel spring


MODEL 9540

Shower curtain hook with rollers. Fabricated of stainless steel wire with snap fastener.

See technical data from website.







MODEL 9530-60

Shower curtain rod fabricated of stainless steel, seamless construction with exposed surfaces in architectural satin finish. Accommodates 60" (1524 mm) shower stall increasing space in shower stall.

BX

BX

BX

BX

-78 Bright Polished Finish

MODEL 9530-72

MODEL 9531

Heavy-duty shower curtain rod with exposed mounting. Rod of 18-gauge, satin-finish stainless steel; 1.25" (32 mm) O.D. Flanges of 22-gauge,satin-finish stainless steel; 3" O.D (76 mm). For lengths 72" (1829 mm) and greater, model 9522 is required. Must specify distance from ceiling.

Sizes:

36," 42," 48" and 60" (914 mm, 1067 mm, 1219 mm and 1524 mm)

MODEL 9531-4

Bright Finish

For lengths 72" (1829 mm) and greater, model 9522 (ceiling support) is required. Must specify distance from ceiling.

MODEL 953

Shower curtain rod of satin-finish stainless steel; 1" (25 mm) O.D. For rods over 72" (1829 mm) and L shaped, specify model 9531 or 9539.


Sizes:

36", 42", 48", 60" and 72"


(914 mm, 1067 mm, 1219 mm, 1524 mm and 1829 mm)

MODEL 953-4

Bright Finish







Heavy-duty shower curtain rod with concealed mounting. Fabricated of satin-finish stainless steel; 1.25" (32 mm) O.D. Flanges 3.1875" (81 mm) O.D. Escutcheons snap over flanges to provide concealed mounting. For lengths 72" (1829 mm) and greater, model 9522 (ceiling support) is required. Must specify distance from ceiling.

Sizes:

36", 48" and 60" (914 mm, 1219 mm and 1524 mm)

MODEL 9539-4

Bright Finish

For lengths 72" (1829 mm) and greater, model 9522 is required. Must specify distance from ceiling.

MODEL 9538

Shower curtain rod of satin-finish stainless steel; 1" (25 mm) O.D. For rods over 72" (1829 mm) and L shaped, specify model 9531 or 9539.


Sizes:

Bright Finish

36", 42", 48", 60" and 72" (914 mm, 1067 mm, 1219 mm, 1524 mm and 1829 mm)

MODEL 9538-4





MODEL 9522

Shower rod ceiling support. For 1.25" (32 mm) O.D. shower curtain rod. Chrome-plated brass bracket, stainless steel rod and collar.

Required for shower rod 72" (1829 mm) and greater. Must specify distance from ceiling.


BX ed of

BX

BX

Security Accessories

You can rely on Bradley for a complete line of durable Security Fixtures for penal institutions and detention facilities. Our broad-based accessory line ranges from bookshelves and clothes hooks to soap dishes and tissue holders. All are fabricated of heavy-duty stainless steel.



MODEL SA30

Security towel hook fabricated of heavy-duty stainless steel with exposed surfaces in architectural satin finish. One-piece formed and ground smooth.

Chase-Mounted

Unit measures 5" W x 5" H (127 x 127 mm)


Projects 1.3125" (33 mm) from wall



BX

Front-Mounted (shown)

MODEL SA31



MODEL SA32

Security towel hook strip fabricated of heavy-duty stainless steel with exposed surfaces in architectural satin finish. All seams are welded and ground smooth.

Chase-Mounted

Unit measures 18" W x 5.5" H (457 x 140 mm)


Projects 1.3125" (33 mm) from wall

MODEL SA33

Front-Mounted (shown)



6



MODEL SA35

Security towel hook backplate fabricated of heavy-duty stainless steel in architectural satin finish. Safety hook of stainless steel with pivoting ball joint that releases when excessive force is applied.


Chase-Mounted (shown to the left, top)

Unit measures 4" W x 4" H (102 x 102 mm)

Projects 2.25" (57 mm) from wall


MODEL SA36


Front-Mounted (shown to the left, bottom)







ВХ



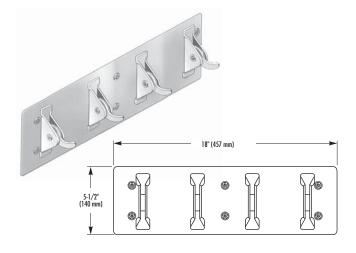





MODEL SA37

Safety clothes hook. Bracket is fabricated of heavy-duty stainless steel with stainless steel hook. Hook trips into down position when excessive loading is applied. Tension can be adjusted by special torx driver.

BX

Front-Mounted

Unit measures 1" W x 4.3125" H (25 x 110 mm)

Projects 3" (76 mm) from wall

MODEL SA38

Security clothes hook strip. Bracket is fabricated of heavy-duty stainless steel with stainless steel hook. Hook trips into down position when excessive loading is applied.

Chase-Mounted

Unit measures 18" W x 5.5" H (457 x 140 mm)

Projects 3" (76 mm) from wall

MODEL SA39

Front-Mounted (shown)

MODEL SA41

Security towel hook strip fabricated of heavy-duty stainless steel with exposed surfaces in architectural satin finish. All seams are welded and ground smooth. Safety hooks with pivoting ball joints that release when excessive force is applied.

Unit measures 18" W x 6.0625" H x 2.25" D (457 x 154 x 57 mm)


MODEL SA70


Grab bar, heavy-duty stainless steel tubing 1.5" (38 mm) O.D. with welded stainless steel mounting flanges. Meets or exceeds the requirements of ANSI Standard A117.1, the ADA and ABA Accessibility Guidelines for Buildings and Facilities (ADAAG) and the Uniform Federal Accessibility Standard (UFAS). Exposed front mounting with torx-head screws with welded stainless steel closure plate.


See technical data for BradEX sizes

BX

Security Accessories






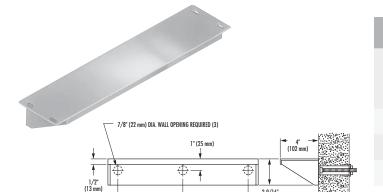

→ <-- 7" (178 mm)

7" (178 mm)

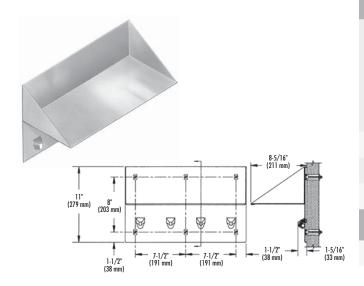

MODEL SA47

Chase mounted, recessed shelf is fabricated of heavy-duty stainless steel with exposed surfaces in satin finish. Threaded studs are provided for rear mounting to specified wall thickness.

Chase-Mounted

Unit 18" (457 mm) measures 16" W x 5" H x 4" D (406 x 127 x 102 mm) with 18" x 7" flange (457 x 178 mm)

MODEL SA49

Security, recessed shelf fabricated of heavy-duty stainless steel with exposed surfaces in architectural satin finish. All welds are ground smooth with polished corners and burr-free edges. Back of shelf has welded

ð

Chase-Mounted

Unit measures 16" W x 2.5625" H (406 x 65 mm)

anchor nuts to receive threaded studs (provided).

Projects 4" (102 mm) from wall

MODEL SA50

Chase mounted, security shelf with toothbrush slots. Fabricated of heavyduty stainless steel in architectural satin finish. Four slots for toothbrushes. Threaded studs are provided for rear mounting to specified wall thickness.

Chase-Mounted

Unit measures 18" W x 2.5625" H (457 x 65 mm)

Projects 4" (102 mm) from wall.

MODEL SA51

Security bookshelf with clothes hooks fabricated of heavy-duty stainless steel with exposed surfaces in architectural satin finish. All seams are welded and ground smooth. Shelf interior is glass blasted to a uniform finish. Safety hooks fabricated of bright, chrome-plated brass housing with stainless steel ball and spring. Friction mechanism releases when excessive force is applied.

Chase-Mounted (shown)

Unit measures 18" W x 11" H (457 x 279 mm)


Projects 8.3125" (211 mm) from wall.


MODEL SA52

Front-Mounted

2-9/16" (65 mm)



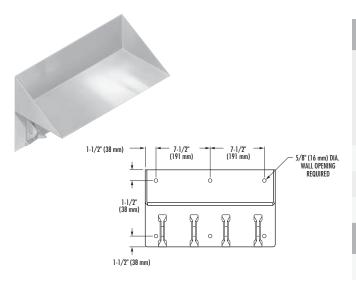



MODEL SA53

Security bookshelf with clothes hooks. Shelf and backplate are fabricated of heavy-duty stainless steel with architectural satin finish. Shelf interior is glass-blast satin finish. Bracket is fabricated of heavy-duty stainless steel with stainless steel hooks. Threaded studs are provided for rear mounting to specified wall thickness.

Chase-Mounted (shown)

Unit measures 18" W x 11" H (457 x 279 mm)

Projects 8" (203 mm) from wall

MODEL SA54

Front-Mounted

MODEL SA55

Security bookshelf fabricated of heavy-duty stainless steel with exposed surfaces in architectural satin finish. All seams are welded and ground smooth. Shelf interior is glass-bead blast finish. Backplate on rear-mounted unit has welded anchor nuts to receive threaded studs (provided).

Chase-Mounted (shown)

Unit measures 18" W x 5.5" H (457 x 140 mm)

Projects 8" (203 mm) from wall

MODEL SA56

Front-Mounted

MODEL SA01

Security mirror frame fabricated of 14-gauge stainless steel. Reinforced with fiberboard backing. Chase mounted with welded anchor nuts on back of frame. Furnished with 0.25"-20 threaded studs cut to length for specified wall thickness. Designed for areas where ordinary mirrors are subject to breakage or theft, or can be used as weapons.

Unit measures 12" W x 16" H (305 x 406 mm)


-1 20-gauge, 300 series stainless steel polished to a No. 8 architectural finish.

-2 20-gauge, 400 series stainless steel with bright annealed finish.

-5 Plexiglas® mirror.

MODEL SA03


Front mounted furnished with vandal-resistant, torx-head machine screws.




12" (305 mm)

11" (279 mm)











7" (178 mm)







70



MODEL SA05

Integral frame security mirror fabricated of stainless steel polished to No. 8 architectural bright finish. Counter-sunk holes for mounting. Furnished with 0.25" (6 mm) tamperresistant machine screws. Designed for areas where ordinary mirrors are subject to breakage or theft, or can be used as weapons. (shown)

Unit measures 11.25" W x 17.25" H (286 x 438 mm)

MODEL SA06

Unit measures 10.0625" W x 11.5625" H

MODEL SA16

Chase-mounted, recessed soap dish fabricated of heavy-duty stainless steel with exposed surfaces in architectural satin finish. Rim of dish is beveled to insure tight fit to wall surface. Threaded studs are provided for rear chase mounting to specified wall thickness.

Unit measures 5.625" W x 3.625" H x 2.75" D (143 x 92 x 70 mm) with 5" x 7" (127 x 178 mm) flange

MODEL SA21

Soap dish fabricated of heavy-duty stainless steel in architectural satin finish. Formed from single-piece stainless steel with three drain holes.

Welded anchor nuts to receive 0.25"-20 provided studs. Nuts and washers included. Chase-Mounted

MODEL SA22

Soap dish supplied with 0.25"-20 x 1.5" L torx-head machine screws for installation to wall anchors. Front-Mounted (shown).

MODEL SA09




BX

Security toilet tissue holder is fabricated of heavy-duty, seamless stainless steel tubing with architectural satin finish. Stainless steel end cap is welded and ground smooth.

Chase-Mounted

MODEL SA10


Front-Mounted (shown)
















· 4-3/4" (121 mm)

0

0

C

8" (203 mm)

MODEL SA11

Chase-mounted, recessed, roll toilet tissue holder is one-piece, drawn stainless steel, seamless construction, 4.3125" (110 mm) deep, 5.5" (140 mm) inside diameter. Roll will project if contraband is concealed behind tissue. Threaded studs are provided for rear mounting to specified wall thickness.

MODEL SA12



Å

3

3

Front-mounted, recessed, roll toilet tissue holder is one-piece, drawn construction with welded front flange plate. Unit is 4.3125"(110 mm) deep, 5.5" (140 mm) inside diameter. Roll will project if contraband is concealed behind tissue.

Unit measures 7" W x 7" H x 4.5" D (178 x 178 x 114 mm)

MODEL SA13

Security toilet tissue holder is fabricated of heavy-duty, seamless stainless steel with exposed surfaces in architectural satin finish. Interior is satin-gloss blast finish. All welds and edges are ground smooth and corners are rounded.

Chase-Mounted

Unit measures 4.75" W x 8" H (121 x 203 mm)

Projects 2.75" (70 mm) from wall.

MODEL SA14	đ
Front-Mounted (shown)	
MODEL SA15	ð
MODEL SAI5	đ

Partition-Mounted (for 1" (25 mm) thick partitions)

MODEL SA25

Security toothbrush holder fabricated of heavy-duty stainless steel with exposed surfaces in architectural satin finish. Formed from single piece of stainless steel. Holds 4 toothbrushes.


Chase-Mounted

Unit measures 5" W x 2.25" H (127 x 57 mm)

Projects 2.8125" (71 mm) from wall


MODEL SA26


Front-Mounted (shown)



Hospitality

Bradley offers guality crafted accessories for hotel washrooms and showers. Sturdy, stainless steel construction provides years of dependable service. Attractive, streamlined design works well with contemporary or traditional styling. Available in a variety of finishes to complement any hotel decor.

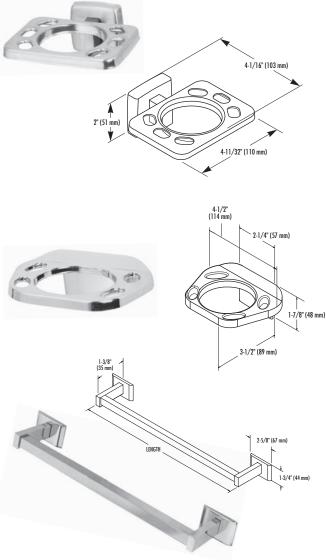



MODEL 9044

BX

Surface-mounted stainless steel tumbler and toothbrush holder. Concealed mounting plate with set screw.

Satin Finish

Unit measures 4.34375" W x 4.0625" D (110 x 103 mm)

MODEL 9045

Bright Polish Finish

MODEL 924

Surface-mounted tumbler and toothbrush holder. Concealed mounting plate with set screw.

Chrome-plated Zamac

Unit measures 4.5" W x 3.5" D (114 x 89 mm)

MODEL 907

Towel bar. Snaps over concealed mounting plate

Chrome Plated Brass

Unit available in 18," 24" and 36" (457 mm, 610 mm and 914 mm) widths.

Projects 1.375" (35 mm) from wall

MODEL 908



3

Heavy-duty, surface-mounted, round towel bar. Support posts are chrome-plated brass with satin finish. Bar is satin finish stainless steel, 1" (25 mm) O.D.


Satin Finish

Unit available in 18," 24" and 30" (457 mm, 610 mm and 762 mm) widths.


Projects 3.25" (83 mm) from wall.


-18 18" (457 mm) Length


-24 24" (610 mm) Length








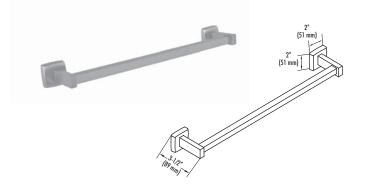

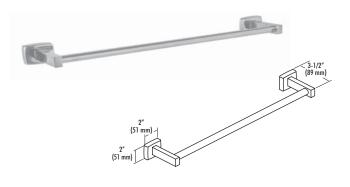



Surface-mounted, 0.75" (19 mm) round towel bar. Concealed mounting plate with set screw.

Chrome-plated Zamac

Unit available in 18" and 24" (457 mm and 610 mm) widths

Projects 3.125" (79 mm) from wall

MODEL 9054

Surface-mounted stainless steel, 0.75" (19 mm) square towel bar. Concealed mounting plate with set screw.

Satin Finish

Units available in 18," 24" and 30"* (457 mm, 610 mm and 762 mm) widths. 30" (762 mm) not available for BradEX shipment.

Projects 3" (76 mm) from wall

MODEL 9055

Bright Polish Finish

MODEL 9065

Surface-mounted stainless steel, 0.75" (19 mm) round towel bar. Concealed mounting plate with set screw.

Satin Finish

Units available in 18," 24" and 30"* (457 mm, 610 mm and 762 mm) widths. 30" (762 mm) not available for BradEX $^{\odot}$ shipment.

Projects 3" (76 mm) from wall

MODEL 9066

Bright Polish Finish

MODEL 9094

Surface-mounted stainless steel, 5" (127 mm) D shelf. Concealed mounting plate with set screw.

Satin Finish

Units available in 18" or 24" (457 mm and 610 mm) widths

Projects 6.25" (159 mm) from wall


MODEL 9095

Bright Polish Finish (shelf is satin finish)



BX

BX

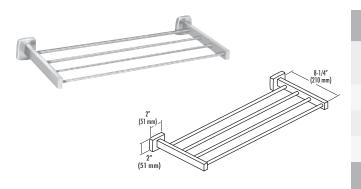

Surface-mounted stainless steel, 8" (203 mm) D towel shelf. Concealed mounting plate with set screw.


Satin Finish

Units available in 18" or 24" (457 mm and 610 mm) widths

See technical data for BradEX sizes

MODEL 9105

Bright Polish Finish

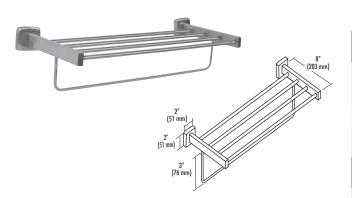

31/8° (-15/16' (49 mm) 50. (-15/16' (49 mm) 50. (-15/16' (49 mm) 50. (-17/12) (-17/1

MODEL 9104-90

Surface-mounted stainless steel, 8" (203 mm) D towel shelf with towel bar. Concealed mounting plate with set screw.

Satin Finish

Units available in 18" or 24" (457 mm and 610 mm) widths

MODEL 9105-90

Bright Polish Finish

MODEL 927

Surface-mounted, 0.75" (19 mm) square towel bar. Concealed mounting plate with set screw.

Chrome-plated Zamac

Unit available in 18" and 24" (457 mm and 610 mm) widths

Projects 3.125" (79 mm) from wall.

MODEL 9301

đ

BX


BX


Surface-mounted, 8.5" (216 mm)deep towel shelf with towel bar and support braces. Concealed mounting plate with set screw.

Chrome-plated Zamac

Unit available in 18" or 24" (457 mm and 610 mm) widths.







Surface-mounted stainless steel, extra heavy-duty, 7-gauge soap dish with drain holes.

BX

BX

BX

F

3

Satin Finish

Unit measures 5.5" W x 2.125" H x 2.75" D (140 x 54 x 70 mm)

MODEL 9014

Surface-mounted stainless steel soap dish with drain holes. Concealed mounting plate with set screw.

Satin Finish


Unit measures 4.25" W x 4" D (108 x 102 mm)

-63 Without Drain Holes


MODEL 9015

Bright Polish Finish

-	Hen.
F	
5	







MODEL 9352

Recess-mounted stainless steel soap dish. Plastic soap tray.

Bright Polish Finish

Rough wall opening 5.25" W x 5.25" H x 2" D (133 x 133 x 51 mm)

MODEL 9353

Satin Finish

MODEL 9362

Recess-mounted soap dish. Heavy, clear-plastic soap tray.

Bright Polish Finish Stainless Steel


Rough wall opening 5.25" W x 5.25" H x 2" D (133 x 133 x 51 mm)


-55 Back Clamp for Drywall Mounting


MODEL 9363


Satin Stainless Steel












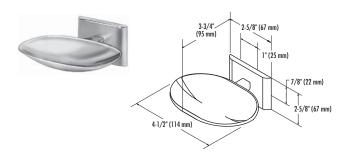

Recess-mounted stainless steel soap dish. Unit anchors in masonry walls with mortar lugs.

Satin Finish

Rough wall opening 6.25" W x 4.25" H x 2.75" D (159 x 108 x 70 mm)

MODEL 9402

Unit with back clamp for drywall mounting

MODEL 9401

Recess-mounted stainless steel soap dish

Rough wall opening 6.25" W x 4.25" H x 2.75" D (159 x 108 x 70 mm)

With Mortar Lugs (shown to the left, top)

MODEL 9403

With Wall Clamp (shown to the left, bottom)

MODEL 9403-96

Unit without drip lip

MODEL 921

Surface-mounted soap dish. Concealed mounting plate with set screw.

Chrome-plated Zamac

Unit measures 3.9375" W x 2.875" D (100 x 73 mm)

MODEL 921-60

With Drain Holes

MODEL 901

Soap dish. Snaps over concealed mounting plate.


Chrome Plated Brass

MODEL 901-60

With Drain Holes



BX



10-3/8" (264 mm)

Ġ.

1-3/4" (44 mm) 11-5/8" (295 mm)

(2) MOUNTING HOLES

5" (127 mm)

4" (102 mm)

MODEL 987

Recess-mounted facial tissue dispenser fabricated of stainless steel with exposed surfaces in satin finish. Rolled rim on face plate opening. Holds one box of 100 tissues.

Satin Finish

Unit measures 11.625" W x 6.25" H x 2.625" D (295 x 159 x 67 mm)

MODEL 987-78

Polished Stainless Steel Finish

See bradleycorp.com for exact dimensions of each model.




Recess-mounted, large-capacity facial tissue dispenser fabricated of stainless steel with exposed surfaces in satin finish. Holds one box of 300 tissues.

Satin Finish

6-1/4" (159 mm) Rough wall opening 10.75" W x 5.125" H x 4" D (273 x 130 x 102 mm)

See bradleycorp.com for exact dimensions of each model

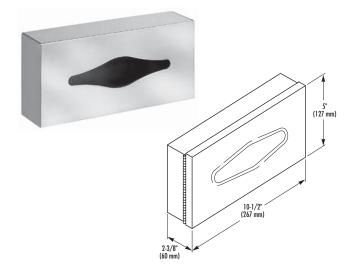

MODEL 987-11

ð

3

F


Surface-mounted facial tissue dispenser fabricated of stainless steel with exposed surfaces in satin finish. Holds one box of 100 tissues.

Satin Finish


Unit measures 10.5" W x 5" H x 2.375" D (267 x 127 x 60 mm)

See bradleycorp.com for exact dimensions of each model
























Surface-mounted stainless steel clothes hook. Exposed mounting.

Satin Finish

Projects 1.5" (38 mm) from wall

MODEL 9114

BX ð

ð

Surface-mounted stainless steel, single robe hook. Concealed mounting plate with set screw.

Satin Finish

Units measure 2" W x 2" H (51 x 51 mm)

Projects 2" (51 mm) from wall

3 BX

BX

3

Bright Polish Finish

MODEL 9115

MODEL 917

Surface-mounted stainless steel, single robe hook. Exposed mounting

Satin Finish

Projects 1.125" (29 mm) from wall

MODEL 9124



Surface-mounted stainless steel, double robe hook. Concealed mounting plate with set screw.

Satin Finish

Projects 2.25" (57 mm) from wall

BX

Bright Polish Finish

MODEL 9125

MODEL 9314

BX

Surface-mounted stainless steel towel hook. Concealed mounting plate with set screw.


Satin Finish

Projects 4.4375" (113 mm) from wall

MODEL 9315

Bright Polish Finish


Projects 4.125" (105 mm) from wall




























Surface-mounted, single robe hook. Concealed mounting plate with set screw.

Chrome-plated Zamac

Projects 2.125" (54 mm) from wall

MODEL 9311

Surface-mounted towel hook. Concealed mounting plate with set screw.

Chrome-plated Zamac

Projects 5.125" (130 mm) from wall.

MODEL 932

Surface-mounted, double robe hook. Concealed mounting plate with set screw.

Chrome-plated Zamac


Projects 1.5" (38 mm) from wall

MODEL 911

Single robe hook. Snaps over concealed mounting plate.

Chrome-plated Brass

Projects 2" (51 mm) from wall




MODEL 9118 Robe hook constructed of forged brass with bright chrome finish Unit measures 3" (76 mm) in diameter Projects 3.9375" (100 mm) from wall Exposed Mounting -**81** Satin Chrome-Plated Brass MODEL 9119 **S**


Concealed Mounting




3 BX












MODEL 915	ð BX
Hook and bumper. Exposed fasteners.	
Chrome-plated Brass	
Projects 3" (76 mm) from wall.	





MODEL 9134 Surface-mounted stainless steel, combination hat and coat hook. Concealed mounting plate with set screw. Satin Finish Projects 2.625" (67 mm) from wall MODEL 9135

Bright Polish Finish



Projects 1.75" (44 mm) from wall

MODEL 914

Double hook. Exposed fasteners. Unit measures 2.75" in diameter.

T BX


ð BX


Chrome-plated Brass

Projects 1.5" (38 mm) and 3.5" (89 mm) from wall










Satin Finish

Projects 2.375" (60 mm) from wall

MODEL 9335

Bright Polish Finish





MODEL 934



ð BX

3


BX

Surface-mounted towel ring. Concealed mounting plate with set screw.

Chrome-plated Zamac

Projects 1.75" (44 mm) from wall





MODEL 9495

Surface-mounted cup dispenser. Fabricated of 22-gauge stainless steel with exposed surfaces in architectural satin finish. Cabinet hinged at bottom and secured with tumbler lock on top. Holds 150 - 3 oz (89 ml) cups. Also accommodates 7 oz (207 ml) cups.

Unit measures 3.25" W x 14.5" H x 3.25" D (83 x 368 x 83 mm)




MODEL 947

Surface-mounted retractable clothesline. Constructed of heavygauge No. 8 bright polished stainless steel. Cord length is 6' (1.83 M).


Custodial

Bradley offers a variety of hook, holder and shelf combinations to organize custodial equipment. Different configurations are available to fit any need or any space. Welded stainless steel construction stands up to tough use. Available in architectural satin finish.

8" (203 mm)







MODEL 9933



One-piece construction with welded gusset and hooks. Mop and broom holders consist of spring-activated rubber cams on platedsteel retainers.


Unit measures 14" H x 34" L (356 x 864 mm). Shelf projects 8" (203 mm) from wall

Has 4 hooks and 3 holders

MODEL 9934

Unit 44" (1118 mm) L, has 5 hooks and 4 holders.

MODEL 9943	ð BX
Unit measures 7.25" H x 24" L (184 x 610 mm). Projects 2.25" (57 mm) from wall. Has 3 hooks.	
MODEL 9944	8
Unit 36" (914 mm) L, has 4 hooks	
MODEL 9945	3
Unit 48" (1219 mm) L, has 5 hooks	
MODEL 9946	3
Unit 60" (1524 mm) L, has 6 hooks	



- 16" (406 mm)


← 4" → (102 mm)



MODEL 9955

Unit 48" (1219 mm) L, has 5 holders

← 4" → (102 mm)



Surface-mounted utility shelf with drying rod. Fabricated of satinfinish stainless steel. Mop and broom holders of spring-activated rubber cams on plated-steel retainers.

Unit measures 30" L x 8" D (762 x 203 mm). Has 2 hooks and 3 holders.

MODEL 9984


Unit 36" (914 mm) L, has 3 hooks and 4 holders

MODEL 9985

Unit 42" (1067 mm) L, has 4 hooks and 5 holders

MODEL 9986

Unit 48" (1219 mm) L, has 5 hooks and 6 holders



MODEL 991

Corner guard, fabricated of stainless steel with exposed surfaces in architectural satin finish. Exposed surfaces are rounded. No sharp corners. Secured to wall with special adhesive backing.


Unit measures 3.5" W x 40" H (89 x 1016 mm)

See technical data for BradEX sizes




Hygiene, durability and safety are featured in Bradley's hospital/patient care line. Fabricated of stainless steel for continuous, trouble-free use.

















MODEL 9813



Specimen pass-thru cabinet. Self-closing doors with stainless steel piano hinges and chrome-plated brass knobs. Interlock mechanism prevents both doors from being open at the same time. Equipped with seamsoldered spill tray.

Rough wall opening 11.625" W x 10.875" H (295 x 276 mm)

Flanges adjust from 3.5" (89 mm) to 5.5" (140 mm) wall thickness.

MODEL 989

Recessed needle disposal fabricated of stainless steel with exposed surfaces in satin finish. Door secured by piano hinge. Removable needle disposal with tumbler lock.

Rough wall opening 12" W x 17.375" H x 5" D (305 x 441 x 127 mm)

Needle disposal not included

MODEL 989-11

Surface-Mounted

MODEL 990

Recess-mounted bedpan storage cabinet. Door has full-length piano hinge, magnetic catch, rodstop, chrome-plated brass knob and ventilation louvers. Interior rods and removable drip pan. Leak-proof bottom prevents leakage behind unit and into wall structure.

Rough wall opening 15.625" W x 29.0625" H x 5" D (397 x 738 x 127 mm)

MODEL 990-11

Surface-Mounted

MODEL 9905

Surface-mounted bedpan and urinal storage unit. Fabricated of stainless steel with exposed surfaces in satin finish.

Unit measures 12" W x 24" H (305 x 610 mm)


Projects 5.25" (133 mm) from wall

Note: Bedpan and urinal not included


























Recess-mounted, stainless steel medicine cabinet. 0.25" (6 mm) thick mirrored door 17.125" W x 30.625" H (435 x 778 mm) and spring-buffered rodstop. Cabinet may be field inverted for left hand door swing. Three adjustable stainless steel shelves.

Rough wall opening 15.625" W x 29.125" H x 4" D (397 x 740 x 102 mm)

-10 Semi-Recessed

-11 Surface-Mounted

MODEL 9661

BX

BX

BX

Recess-mounted medicine cabinet. Cabinet is fabricated of sturdy onepiece, white injection-molded polystyrene. Door is steel with bakedenamel finish. Door has full piano hinge and magnetic catch. Mirror frame of stainless steel. Two adjustable polystyrene shelves. Reversible to swing either left or right.

Rough wall opening 14" W x 18" H x 3" D (356 x 457 x 76 mm)

MODEL 9663

Recess-mounted medicine cabinet. Seamless cabinet fabricated of one-piece, heavy drawn steel with baked-enamel finish. Mirror frame of stainless steel. Mirror of first-quality float glass, electro-copper-plated backed. Three adjustable prepainted metal shelves. Reversible for left or right hand swing.

Rough wall opening 14" W x 24" H x 3.625" D (356 x 610 x 92 mm)

MODEL 9664

Surface-mounted medicine cabinet. Fabricated of heavy-gauge steel with baked-enamel finish. Mirror frame of stainless steel. Mirror of first-quality float glass, electro-copper-plated backed. Two removable metal shelves. Reversible for left or right hand swing.

Unit measures 16.25" W x 22.25" H x 5" D (413 x 565 x 127 mm)



BRADMAR[™]

Fabricated from 30% pre-consumer or 100% post-consumer recycled high-density polyethylene (HDPE). No-Site[™] style partitions with no gap between the doors and pilasters are available in Bradmar. Standard colors including speckled and solid colors with stainless steel shoes and aluminum wall brackets. Suited for humid and wet areas, and high-traffic or vandal-prone locations. Recommended for schools, parks, recreation centers. 15-year warranty.

Hardware: Heavy-duty aluminum.



PHENOLIC

Highly durable. Almost any Formica[®], Arborite[®] or Trespa color/pattern can be selected. Edges are solid black. Recommended for humid and wet areas. Resists water, oil, and bacteria. Withstands hose-down cleaning. Suited for outdoor parks, pools, shower rooms. 3-year warranty against delamination and discoloration.

Hardware: Heavy-duty, cast stainless steel, stamped stainless steel door hinges.



POWDER COATED

High-quality gloss finish. Low cost. Recommended for office buildings, restaurants, religious institutions and environments less prone to vandals. 15-year warranty against rust-out.

Hardware: Heavy-duty, chromed Zamac..



FUSION GRANITE

Four colors of natural granite and three stainless steel finishes. Combines the natural beauty and durability of granite with the sleek style of stainless steel.



STAINLESS STEEL

High design and contemporary style. Soft brushed satin finish, 5WL textured or leather-grain patterns available. Textured patterns wrap around edges. Recommended for airports, stadiums, rest stops. 15-year warranty against rust-out.

Hardware: Heavy-duty, chromed Zamac.





SENTINEL[™] OVERHEAD BRACED — SERIES 400

Overhead braced partitions provide the most economical solution for heavy-traffic and vandalism-prone areas. Because it requires no special floor or ceiling construction, installation is easy in new or old buildings. The anti-grip head rail provides outstanding rigidity.



FLOOR BRACED – SERIES 500

This style complements design with functional performance. Recommended for buildings with high ceilings, it enhances the effect of spaciousness. A minimum of 3" (76 mm) concrete construction is required for anchoring. This style is not available in Bradmar solid plastic.




CEILING HUNG – SERIES 600

Ideal for areas with low ceilings. Offering an area free from obstruction to allow for fast and easy maintenance, this system requires proper structural supports in the ceiling for maximum rigidity. Not recommended for ceiling heights over 8' (2.4M). This style is not available in Bradmar solid plastic.



FLOOR-TO-CEILING - SERIES 700

Anchored at the floor and ceiling, main structural support can be provided by Series 500 or 600 mounting systems. Perfect for areas where additional support is required.



URINAL SCREENS

Wall-hung style provides economy and ease of maintenance while floor supported or floor-toceiling (not shown) screens offer extra stability for high-traffic areas.



SHOWER DIVIDERS

Available in Bradmar solid plastic, an advanced formula of high-density polyethylene (HDPE). Standard sized or customized to meet your facility layout, Bradmar shower dividers are available in multiple colors, including speckled and solid colors (see bradleycorp.com for complete list of colors). All Bradmar solid plastic products are covered by a 15-year warranty.

Lenox[®] Lockers

Design flexibility is a prime feature of Lenox[®] Lockers, offering countless options and configurations. Installation is simple. Lockers are shipped fully assembled and ready for attachment to the wall and each other.

Solid plastic lockers are formed of polymer resin with homogeneous color. Doors and frames are 1/2" (13 mm) thick, and sides, shelves, tops and bottoms are 3/8" (10 mm) thick. Locker box is one piece, all welded construction, providing outstanding rigidity and strength. Continuous latch bar runs the entire length of the door, providing a secure closure. Handle mechanism is capable of accepting a padlock and is securely fastened to the door. Stainless steel piano hinge is continuous and integrates into the full length of the door and main locker body. 20-year warranty against rust, delamination or breakage of any of the plastic components under normal use.



OPTIONS INCLUDE

Built-in Key Locks	End Panels	Number Plates
Built-in Combination Locks	Solid Plastic Bases	Plastic Coat Hooks
Coin-Operated Locks	Slope Tops	Coat Rods
Card Locks	Colored Flat Tops	Wall Hooks
Keypad Locks	Mesh Doors	Fillers
Combination Padlocks	Engraved Logos	Mirrors



Z-LOCKER

Z-Locker design provides practical multitiered storage without wasting valuable floor space or compromising customer satisfaction. Double your locker availability while still providing clients with hanging space to keep garments wrinkle free.



CUBBY LOCKER

The easy-access cubby locker is perfect for items that do not require locked storage. The durable cubby is shipped fully assembled and can reduce installation costs by up to 50 percent.

Note: Three cubby lockers shown.

CUBBY BENCH

Convenient seating and easy-access storage in one. Space-saving solution. Shipped fully assembled.

GEAR LOCKERS

Wider and deeper than standard lockers, Lenox Gear Lockers provide maximum storage and maximum durability with the best lead time and best warranty available!



LOCKER BENCH

The 1" (25 mm) thick bench top is smooth, seamless and oversized. The 20" (508 mm) locker underneath provides valuable additional storage apace. Available in 3' (0.9 M) through 6' (1.8 M) lengths.



PEDESTAL BENCH

The bench top is 1.5" (38 mm) thick and available in 36" (914 mm) to 96" (2438 mm) in one-foot increments. Pedestals are black anodized aluminum. ADAcompliant height is 18.5" (470 mm). 9.5" 12," 18" and 24" (241 mm, 305 mm, 457 mm and 610 mm) widths available.





88 Bradley Accessories JXT Company | 828-735-1978 | 828-538-4311 | sales@jxtcompany.com





STAINLESS STEEL

Stainless Steel is a low-carbon steel that contains chromium. The addition of chromium gives the steel its unique corrosion-resisting properties. It is extremely durable, resists corrosion, and stands up to many chemicals.

Despite the fact that stainless steel surfaces are generally non-tarnishing, they are not stain or rust proof. Stainless steel must be kept clean and free from contaminants. Frequent cleaning with mild soap and water or glass cleaner and a cotton cloth is required. Any discoloration or corrosion (commonly caused by contact with harsh cleaner, muriatic acid or bleach solutions) should be removed as soon as possible or permanent discolora tion and pitting of the surface could occur. Most discoloration can be removed with a mild cleanser or stainless steel cleaner and a Scotchbrite® pad. The surface should then be thoroughly rinsed with clear water. With proper maintenance, stainless steel will maintain its luster and appearance indefinitely.



MIRRORS

Bradley mirrors are fabricated from heavy-gauge stainless steel frames and plate glass or an alternative reflective surface. The frame can be cared for by following the general stainless steel maintenance instructions above. Reflective surfaces can be cleaned with any standard non-abrasive glass cleaner and a soft cloth. Care must be taken to avoid allowing the cleaner to run down the surface of the mirror and collect in the frame. If allowed to continue, this could lead to premature silver spoilage and spotting on stainless steel.



SOAP DISPENSERS

Bradley soap dispensers provide dependable, consistent operation over the long term when the proper soap is used and when a minimal amount of periodic maintenance is performed on the valves. Soaps satisfying these basic guidelines will provide consistent flow and reduce clogs.

Soap thickness is determined by a measurement called viscosity. Soap viscosity should be between 100 cps (centerpoise) and 2500 cps for all Bradley soap dispensers. The pH (acid) level of soaps that will perform consistently should be in the range of 6.5 to 8.5. More acidic soaps (pH levels lower than 6.5) will corrode metal parts (even stainless steel) and degrade rubber and plastic components. Most inexpensive soaps (typically the pink lotion type) fall into this acidic category and will eventually cause valve failure and metal corrosion. PCMX or Isopropanol-based antibacterial soaps (within viscosity and pH limits) will also work with Bradley dispensers.

Valves must also be maintained (cleaned) to function properly. At the very minimum, hot water should be pumped through valves periodically to clear out soap residue. Ideally valves should occasionally be soaked for 30 minutes in hot water or a soap valve cleaning solution. With proper maintenance and soap, Bradley dispensers will provide long-term, trouble-free operation.

Index

MODEL NO.	PAGE	MODEL NO.	PAGE	MODEL NO.	PAGE	MODEL NO.	PAGE
155	14	377-36	20	780	40	1985	15
175	85	377-3637	20	781	40	2017	28
198	14	377-37	20	782	41	2027	28
2A00	21	377-3738	20	790	43	2037	28
2A01	21	377-38	20	812	5	2251	29
2A02	21	4A00	55	817	5	2252	29
2A09	21	4A10-11	55	832	5	2271	30
2A10-11	21	4A11	55	837	5	2277	30
2A05	27	4A20	57	852	5	2291	31
2A15-36	27	401	57	900	75	2297	31
2A25-36	27	407	57	901	76	2441	22
2A95-36	27	5A00	44	901-60	76	2442	22
225	29	5A10	44	907	72	2447	22
227	30	5A20	44	908	72	2479	23
229	30	5A40-11	54	911	79	2482-11	23
234	31	505	45	912	80	2483	23
234-35	31	508	46	914	80	2484	24
234-65	31	508-32	47	915	80	2494	24
235	31	510	48	917	78	2495	24
236	32	515	50	921	76	2496	25
237	32	522	45	921-60	76	2497	25
237-35	32	523	47	924	72	2901-2873	12
237-65	32	582	54	926	73	2901-2874	12
238	32	583	54	927	74	2902-280000	13
244	22	584	54	931	79	2902-287300	13
247	23	591	51	932	79	2902-287400	13
250-15	25	592	51	934	81	2903-280000	13
250W-15	25	594	52	940	76	2904-280000	13
251-15	25	6A00-11	34	947	81	2905-287300	13
252	26	6A01-11	34	953	64	2921-5000	3, 12
259	26	643	34	953-4	64	2921-W000	3, 12
270	32	644	34	954	59	2922-2873	3, 12
3A05	16	646	34	957	62	2922-2874	3, 12
3A15-11	16	648	36	958	62	3157	16
315-35	17	650	36	962	58	3251	16
334	17	655	36	962-11	58	3257	17
344	18	657	36	963	58	3565	19
344-35	18	658-30	37	987	77	4017	57
344-65	18	661	37	987-11	77	4721-15	55
346	18	662	37	987-36	77	4722-1015	55
355	18	740	41	987-78	77	4722-15	56
355-35	18	747	42	989	84	4731-15	56
356	19	747F	42	989-11	84	4737	56
356-35	19	748	42	990	84	4781-15	56
357	19	755	43	990-11	84	4791-15	56
357-35	19	756	43	991	83	5053	45
359	19	758	43	1471	14	5054	45
377	20	760	43	1981	15	5061	44,45
							,



MODEL NO.	PAGE	MODEL NO.	PAGE	MODEL NO.	PAGE	MODEL NO.	PAGE
5071	46	6481	36	9352	75	9983	83
5084	46	6501	36	9353	75	9984	83
5085	46	6531	35	9362	75	9985	83
5102	48	6542	35	9363	75	9986	83
5103	49	6562	35	9401	76	P10-696	20
5104	49	6563	35	9402	76	P15-025	20
5105	40	6583	37	9403	76	P15-025	20
5106	49	6843	39	9403-96	76	P15-195	20
5123	47	7405	41	9495	81	SA01	69
5124	49 49		41	9522	65		69
		7481				SA03	
5125	49	7510	43	9530-60	64	SA05	70
5126	47	7512	43	9530-72	64	SA06	70
5127	49	7805	40	9531	64	SA09	70
5224	45	7815	41	9531-4	64	SA10	70
5234	46	8170-158	11	9533	63	SA11	71
5235	46	8170-1581	11	9534	63	SA12	71
5241	46	8370-101	11	9535	63	SA13	71
5262	47	8370-102	11	9536	63	SA14	71
5263	47	8370-103	11	9537	63	SA15	71
5402	48	9014	75	9538	65	SA16	70
5412	50	9015	75	9538-4	65	SA21	70
5422	50	9044	72	9539	65	SA22	70
5424	48	9045	72	9539-4	65	SA25	71
5425	48	9054	73	9540	63	SA26	71
5831	54	9055	73	9541	59	SA30	66
5847	54	9065	73	9562	59	SA31	66
5911	51	9066	73	9569	59	SA32	66
5912	51	9094	73	9571	62	SA33	66
5921	52	9095	73	9591	60	SA35	66
5922	52	9104	74	9592	60	SA36	66
5932	52	9104-90	74	9593	61	SA37	67
5941	53	9105	74	9594	61	SA38	67
5942	53	9105-90	74	9631	58	SA39	67
5951	53	9111	78	9632	58	SA41	67
5952	53	9114	78	9661	85	SA47	68
6315	38	9115	78	9663	85	SA49	68
6315-KT0000	38	9118	79	9664	85	SA50	68
6322	38	9119	79	9813	84	SA51	68
6322-67	38	9124	78	9905	84	SA52	68
6322-68	38	9125	78	9933	82	SA53	69
6324	38	9134	80	9934	82	SA54	69
6324-67	38	9135	80	9943	82	SA55	69
6324-68	38	9301	74	9944	82	SA56	69
6326	39	9311	79	9945	82	SA70	67
6326-67	39	9314	78	9946	82		
6326-68	39	9315	78	9953	82		
6334	39	9334	81	9954	82		



Commercial Washroom Innovation

JXT Company | 828-735-1978 | 828-538-4311 | sales@jxtcompany.com